


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00382	Connector, dc plug, 4.0x1.7xL19 mm, molding, spring contacts, nickel plated, yellow insulator	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00044	Overmold, PVC, black	1	

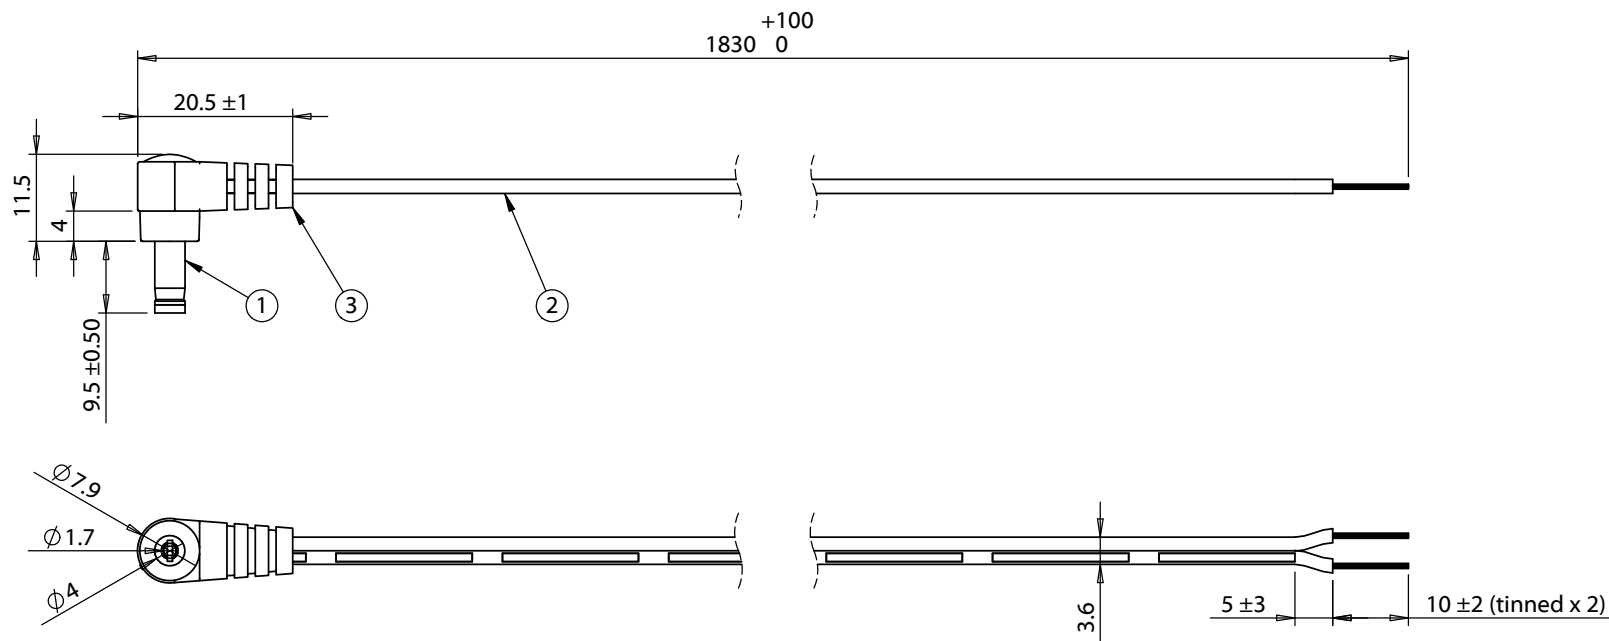

Wiring Diagram	
50-00382	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A1	8/11/2011	Added 90° connector diagram	GL 2016.05.05 16:37:00 -07'00'	RoHS compliant					
A2	8/31/2012	Updated description, connector, and wire information	Verified: LA <small>Digitally signed by LA DN: cn=LA, o=Tensility sc=Engineering email=LA@Tensility.com, c=US Date: 2016.05.05 16:42:06 -07'00'</small>	Function test: no open, no short circuit, no intermittent					
A3	6/27/2012	Updated connector description	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 4.0x1.7x10 mm, 90° 50-00382 dc plug to stripped tinned, 24 AWG, 30-00003 wire					
A4	10/9/2013	Changed connector to 50-00382			<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>053-0197R (CA-2198)</td> </tr> </table>	Size:	Part number:	A	053-0197R (CA-2198)
Size:	Part number:								
A	053-0197R (CA-2198)								
					<table border="1"> <tr> <td>Scale: 1:2</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale: 1:2		Sheet 1 of 1	
Scale: 1:2		Sheet 1 of 1							