


Data sheet

15301.2 SD-S 25CZ

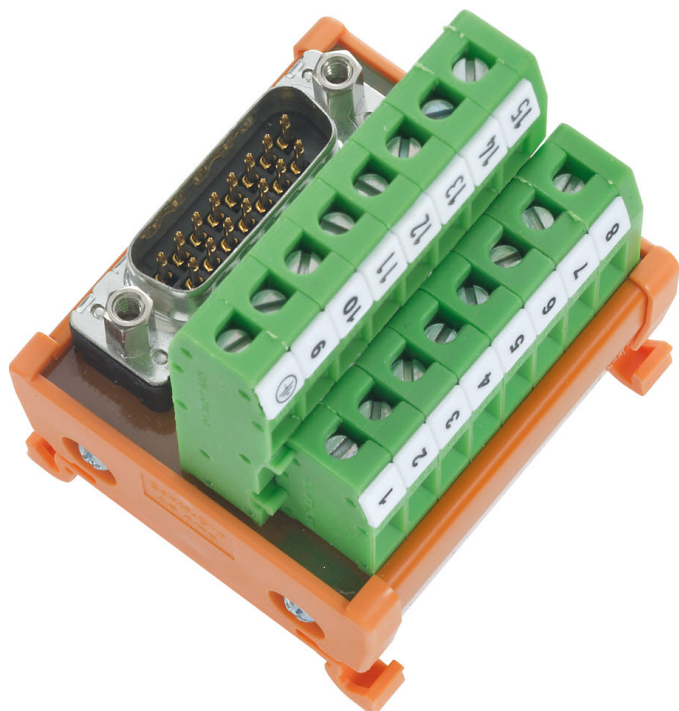

Interface module for D-SUB, Tension-spring connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 25

Business data

Article number	<u>15301.2</u>
Article name	SD-S 25CZ
GTIN (EAN)	4044211078720
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	66.5 g
Weight per piece (including packaging)	129.9 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

Data sheet

15301.2 SD-S 25CZ

Technical data

Dimensions

Length	47 mm
Width	78 mm
Height TS 35/7.5	38 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Tension-spring connection
Number of connections	1
No. of poles	25
Wire cross-section single core (rigid), min.	0.08 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.14 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.14 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm ²
Stripping length	6 mm

Input data

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1,5 A

Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

Further technical data

Mounting type	TS 35
Connector type	D-sub male plug
Test voltage	0.67 kV
Shielded	✓

Data sheet

15301.2 SD-S 25CZ

Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-01-07
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15301.2 SD-S 25CZ



Approvals

Standards and regulations


Standards / specifications

DIN VDE 0110 / EN 50178

Data sheet

15301.2 SD-S 25CZ

Media

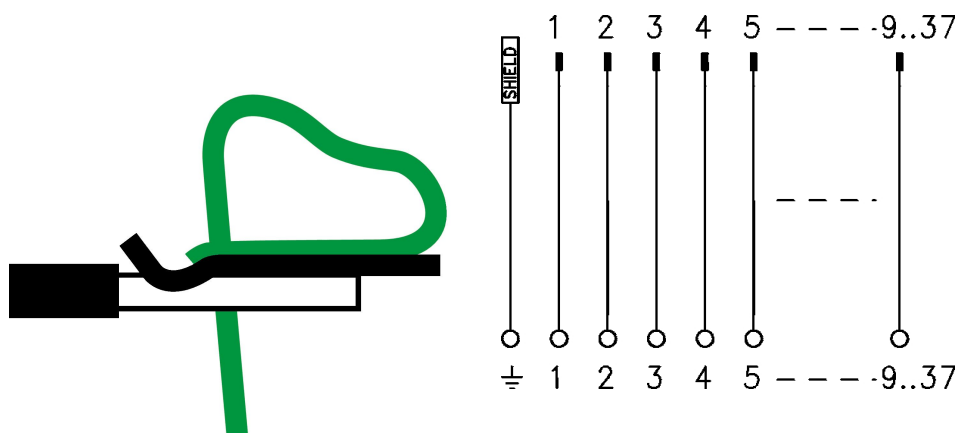

Data sheet

15301.2 SD-S 25CZ



Accessories
