

Printed-circuit board connector - MCC 1/ 9-STZF-3,81 GY - 1712823

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, nominal current: 8 A, number of positions: 9, pitch: 3.81 mm, connection method: Crimp connection, color: gray, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 5A/MCC-MT 0,2-0,35 (1859988); 8A/MCC-MT 0,5-1,0 (1859991)




The figure shows a 10-pos. version of the product in green

Your advantages

- Inexpensive connection of large quantities of pre-assembled conductors
- Screwable flange for superior mechanical stability
- Pull-out aid facilitates handling and allows the tensile force to be reduced at the contact point

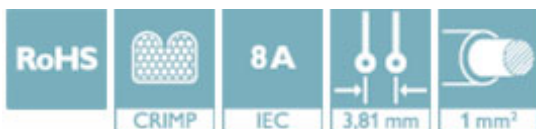

Key Commercial Data

Packing unit	50 pc
GTIN	 4 055626 300344
GTIN	4055626300344

Technical data

Dimensions

Length [l]	23.1 mm
Width [w]	35.08 mm
Height [h]	8.7 mm
Pitch	3.81 mm
Dimension a	30.48 mm

General

Range of articles	MCC 1/..-STZF
Number of positions	9
Connection method	Crimp connection
Insulating material group	I
Rated voltage (III/2)	160 V

Printed-circuit board connector - MCC 1/ 9-STZF-3,81 GY - 1712823

Technical data

General

Nominal current I_N	8 A
Nominal cross section	1 mm ²

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	-------------------------------------------------------------------------------------	---------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>