





ISSUE NUMBER
ORIGINAL

(1)

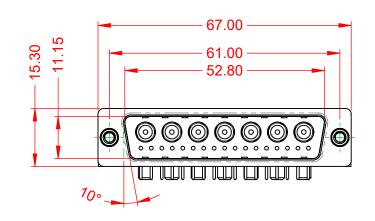




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDAN
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: NCE)

АСТ

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC TORONTO, ONTARIO CANADA ARE THE PROPERTY OF ED SHALL NOT BE REPRODUCE OR USED AS THE BASIS FO MANUFACTURE OR SALE O MANUFACTURE OR SALE O	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-24W7640-5NE		ISSUE	
YOUR C		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-24W	7640-5NE	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

