


C321C472KDR5TA

GoldMax 300 Comm X7R HV, Ceramic, 4700 pF, 10%, 1000 VDC, X7R, GoldMax, Commercial Standard,
Lead Spacing = 6.35mm

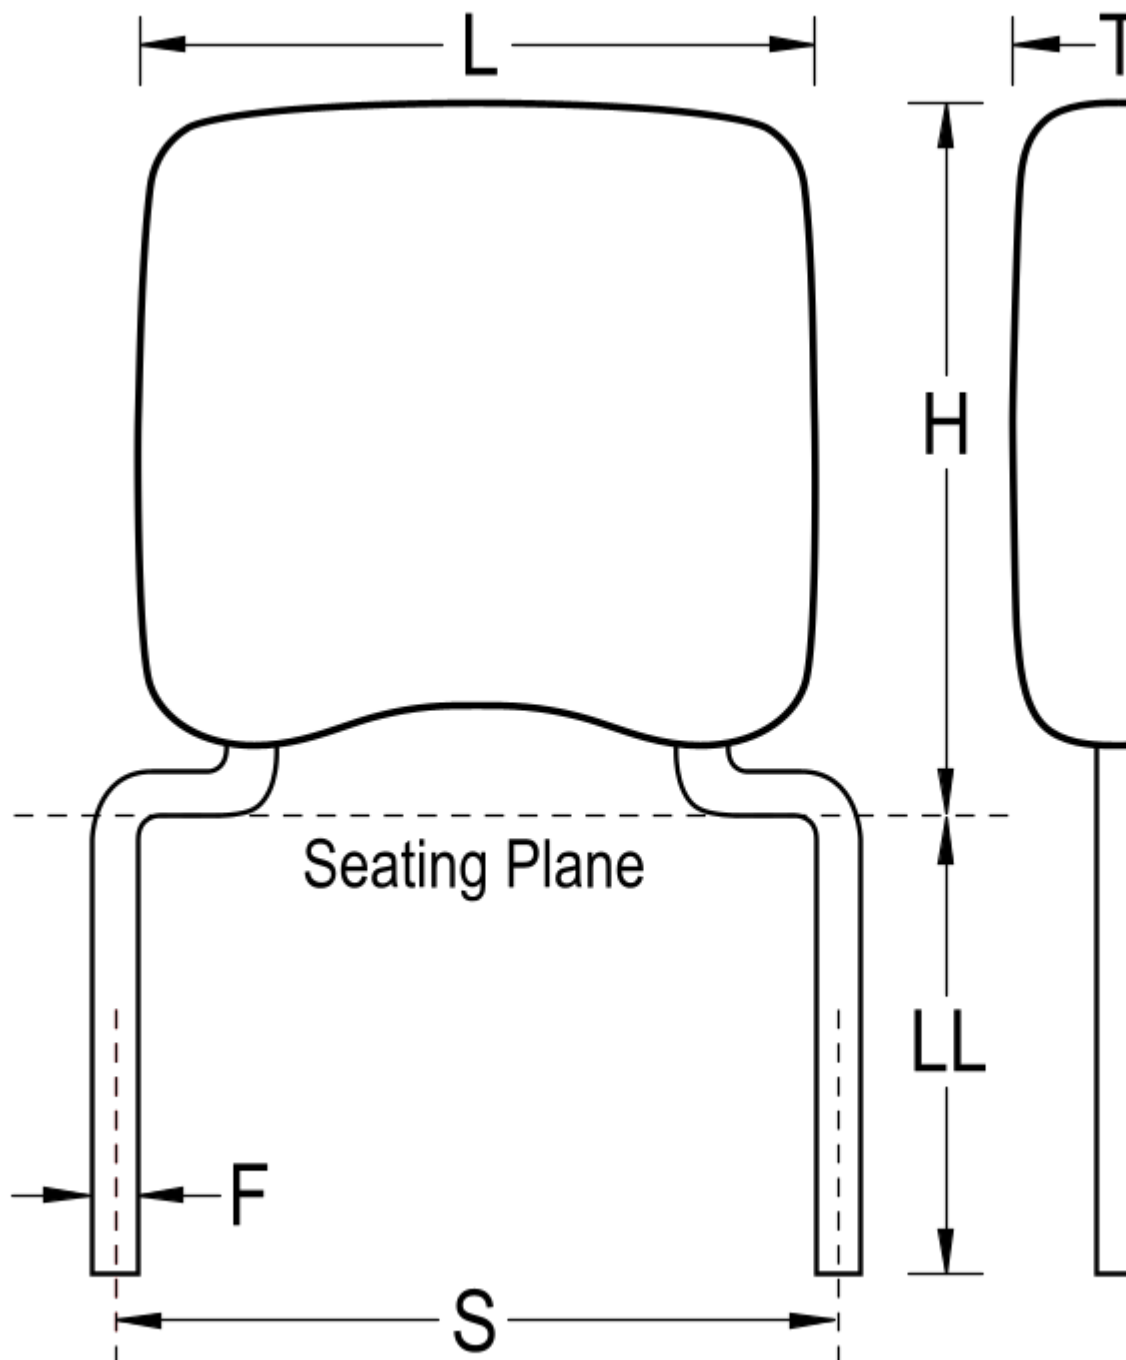

Click [here](#) for the 3D model.

Dimensions

L 5.08mm MAX

H 6.6mm MAX

T 5.08mm MAX

S 6.35mm +/-0.78mm

Dimensions

LL 7mm MIN

F 0.51mm +0.1/-0.025mm

Packaging Specifications

Packaging Bulk, Bag

Packaging Quantity 500

General Information

Series GoldMax 300 Comm X7R HV

Style Radial

Description GoldMax, Commercial Standard

RoHS Yes

Termination Tin

Failure Rate N/A

AEC-Q200 No

Halogen Free Yes

Specifications

Capacitance	4700 pF
Measurement Condition	1 kHz 1.0Vrms
Capacitance Tolerance	10%
Voltage DC	1000 VDC
Dielectric Withstanding Voltage	1200 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	X7R
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	0.15, 1kHz 1.0Vrms
Dissipation Factor	2.5% 1 kHz 1.0Vrms
Aging Rate	3% Loss/Decade Hour: Referee Time is 1000 Hours
Insulation Resistance	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 79ce83c7-e3b4-4a85-80ff-784e486a1075

© 2006 - 2023 KEMET

Generated 5/18/2023 - 79ce83c7-e3b4-4a85-80ff-784e486a1075

© 2006 - 2023 KEMET