


MALE SMA-UMP HIGHT 3 LOCK

R285.025.401

20 CM CABLE 2.6/50 S-BR

Series : **CORD-STD**

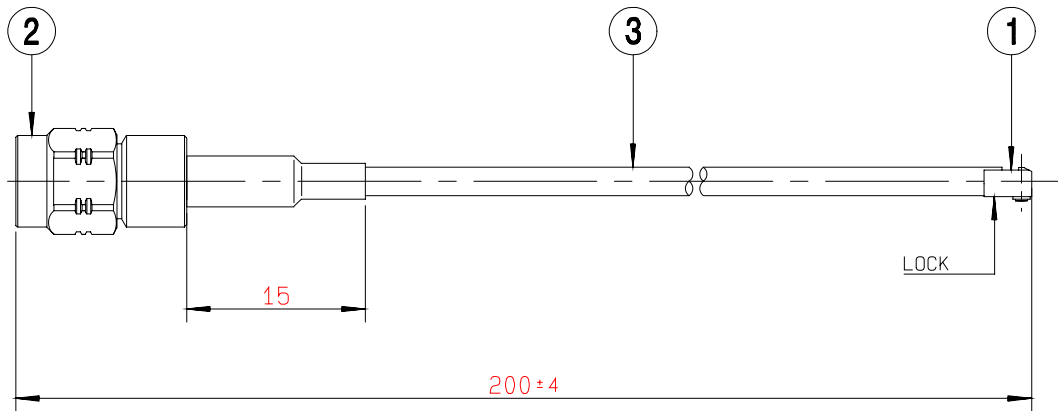

PACKAGING

| Standard | Unit | Other |
|----------|------------|------------|
| 20 | 'W' option | Contact us |

- * 1 * Connector A : **R107.301.200**
- * 2 * Connector B : **R124.071.123**
- * 3 * Cable : **C291.170.017**
- Type : **CAB HF 2.6/50 KX 22A MARRON**

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------------|----------------------------------|
| Impedance | 50 Ω |
| Frequency | 0-3 GHz |
| Operating temperature | -40/+90 ° C |
| VSWR | TBD + 0.000 x F(GHz) Maxi |
| Insertion loss | TBD √F(GHz) dB Maxi |
| Voltage rating | 100 Veff Maxi |
| Dielectric withstanding voltage | 350 Veff mini |
| Insulation resistance | 1000 MΩ mini |

SPECIFICATION

| | |
|-----------------|------------------|
| Weight | 7.100 g |
| Cable retention | 20 N mini |
| Others : | |

