


## Specification Sheet

Part Number: 151-01403

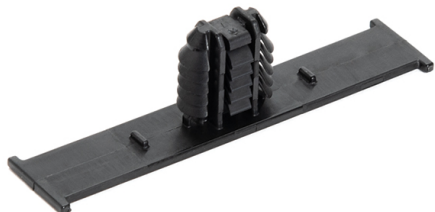

The different fixing orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters.

Bundling Clip w/Oval Fir Tree, 2.28" L, 0.02 - 0.24" Panel Thickness, PA66HIRHSUV, Black, 8000/ctn

**Article Number** 151-01403

**Type** BCFTOVAL

**Color** Black (BK)

**Quantity Per** carton

**Product Description** HellermannTyton Bundling Clips are designed to provide simple and easy methods for securing cable bundles, hoses, or pipes. They are fastened onto the tape bar using tape or cable ties.

**Short Description** Bundling Clip w/Oval Fir Tree, 2.28" L, 0.02 - 0.24" Panel Thickness, PA66HIRHSUV, Black, 8000/ctn

**Global Part Name** BCFTOVAL-PA66HIRHSUV-BK

<b>Length L (Imperial)</b>	2.28
<b>Length L (Metric)</b>	58.0
<b>Fixation Method</b>	Fir Tree for oval holes
<b>Height H (Imperial)</b>	0.60
<b>Height H (Metric)</b>	15.45
<b>Panel Thickness Min (Imperial)</b>	0.02
<b>Panel Thickness Max (Imperial)</b>	0.24
<b>Panel Thickness Min (Metric)</b>	0.51
<b>Panel Thickness Max (Metric)</b>	6.0
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 x 0.48 " 0.26 x 0.50 " 0.26 x 0.51 " 0.28 x 0.47
<b>Mounting Hole Diameter D (Metric)</b>	6.2 x 12.2 mm 6.5 x 12.5 mm 6.5 x 13.0 mm 7.0 x 12.0 mm
<b>Mounting Hole Diameter D Min (Imperial)</b>	0.24
<b>Mounting Hole Diameter D Max (Imperial)</b>	0.51
<b>Mounting Hole Diameter D Max (Metric)</b>	13.0

<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Package Quantity (Imperial)</b>	8000
<b>Package Quantity (Metric)</b>	8000
<b>Customs Number</b>	3926909988