<b>T</b> (	ע (	і   Г	0	)







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

8D 0

G

17

W

20

Ρ

F

Е


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-20



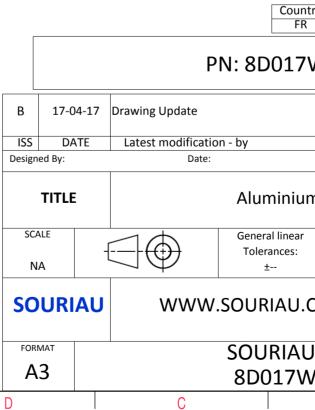

	Φ		A		
					4
S EXA	AMPLE				3
s which er of t indation untry FR	on, technical n Jurisd	mply with by a third party	l List		2
/ //	20PE			MOD N°	-
um	Receptacl	customer d e 8D series			
ar		NPRDS / PI <b>859</b>			1
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 20PE-C			SHEET 1/2	
	В		Α		L

F	т	۵	н т	m	D	0
4	(	Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE 0)
_		4#12 16#22D 17-20	7		¥	
ŝ	Ctc A B C D 1 2 3 4 5	X   Y     0   5.51     3.17   0     0   -5.51     -3.17   0     4.16   7.06     4.29   4.29     7.11   4.03     8.05   1.4     8.05   -1.4				Max. thickness panel for receptacle: Type 0: front m
2	- 6 7 8 9 10 11 12 13 14	7.11 -4.03   4.29 -4.29   4.16 -7.06   -4.16 -7.06   -4.29 -4.29   -7.11 -4.03   -8.05 -1.4   -7.11 4.03   -7.11 4.03				SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend) Coun FR PN: 8D017
	15 16	-4.29 4.29 -4.16 7.06			B 17-04-17 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:
-					SCALE NA SOURIAL	Aluminium General linear Tolerances: ± J WWW.SOURIAU.
	Н	G	F	E	FORMAT A3 D	SOURIAU 8D017V C

