

т	۵ D	п	m	0



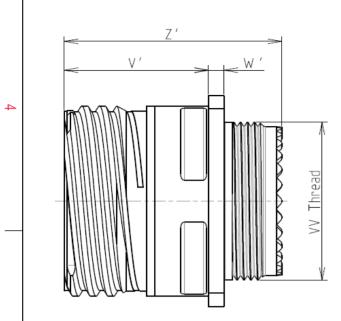



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

/	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: $9.1 \text{ g} \pm 10\%$			

8D 0

G

11

Μ

22

Ρ

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : C


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22



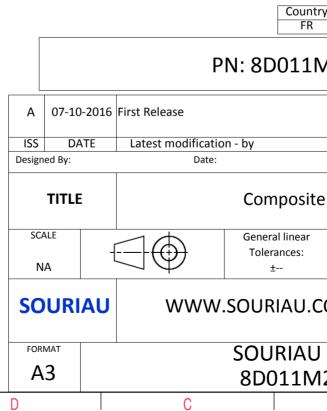

σ		Þ		_	
				4	
AS EXAMPLE				3	
r any non-conformin s which does not co er of the Parties or H ndation, technical n untry Jurisc FR 1M22PC	mply with by a third part			2	
			MOD N°	-	
	CUSTOME	R DRAWING			
ite Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°			SHEET		
M22PC-C		A	1/2	J	
U	I	Π			

,						
4	(Contact Layout 22*				Panel Cut REAR MOUNTING
	Ctc A B C	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905	-		¥(Dim
ω	D	-1.905 1.905]			ØA ØAA R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend Cour
						PN: 8D011
					ISS DATE Designed By: TITLE SCALE	Latest modification - by Date: Composi
_					NA SOURIAL	
	Н	G	F	E	D	SOURIA 8D011N C
					¥	

Т

ш

т

G

0

