

ERC



M3



Feed-through terminal, Faston Spade connection / screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 6 mm, Colour: Beige

### Business data

Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	8.6 g
Weight per piece (including packaging)	9.5 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Feed-through terminal

---

### Technical data

---

#### Dimensions

---

Length	48 mm
Width	6 mm
Height TS 35/7.5	47 mm
Height TS 32	52 mm

---

#### Ratings

---

Rated voltage	500 V
Rated current FastOn 2.8 / FastOn 6.3	13,5 / 24 A
Rated cross-section	2.5 mm <sup>2</sup>
Rated impulse voltage TS 35 / TS 32	8 / 6 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

---

### Technical data

#### Connection data

Connection principle	Screw connection + spade connection
Connection position	Lateral
Connections	2 / 1
Connections FastOn 2.8 / FastOn 6.3	2 / 4
Number of terminals per level	3
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	12 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

---

### Technical data

---

#### Further technical data

---

Mounting type	Mounting rail TS 35/7.5 and TS 32
Gauge plug acc. to EN 60 947-1	A4
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	1

#### Print

---

Colour	Beige
--------	-------

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2022-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---

#### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-1:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA rated voltage	500 V
--------------------	-------

KEMA rated current FastOn 2.8 / FastOn 6.3	13,5 / 24 A
--	-------------

KEMA rated impulse voltage TS 35 / TS 32	8 / 6 kV
--	----------

KEMA wire cross-section stranded	2.5 mm <sup>2</sup>
----------------------------------	---------------------


KEMA wire cross-section stranded, screw connection	4 mm <sup>2</sup>
--	-------------------

KEMA torque, min.	0.5 Nm
-------------------	--------

KEMA torque, max.	1 Nm
-------------------	------

---


### Media

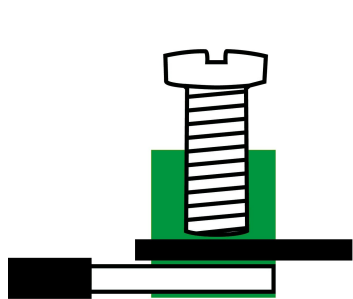

EAC



M3

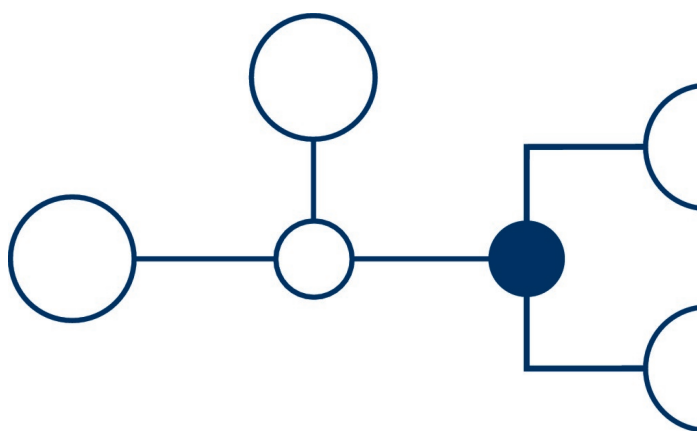

1019.2

SF 2,5-4 BG


---

## Accessories

---

### End plate

---

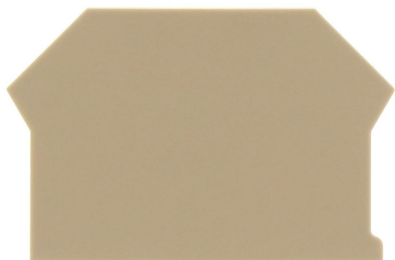

End plate, Width: 1.5 mm, Colour: Beige

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2001.2	AP 2,5-10 BG	4044211047979	50

---

### End stop

---



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST BG	4044211055547	50

---

1019.2

SF 2,5-4 BG

---

## Accessories

---

### Insulating sleeve

---

#### Insulating sleeve

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2429.0	IH 6,3	4044211052140	200 ST

---

#### Insulating sleeve

---

#### General order data


Product number:	Article name	GTIN (EAN)	Packaging unit
2435.0	IH 2,8	4044211052256	200 ST

---



### Accessories


#### Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 17 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data


Product number:	Article name	GTIN (EAN)	Packaging unit
2020.0	Q 3	4044211048235	50 ST



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.9 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2019.0	Q 2	4044211048228	50 ST



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 23.1 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

#### General order data

Product number:	Article name	Creation date 15.02.2022 22:08:15 Subject to technical changes	GTIN (EAN)	Packaging unit
2021.0	Q 4		4044211048242	20 ST

1019.2

SF 2,5-4 BG


---

## Accessories

---

### Cross-connector

---

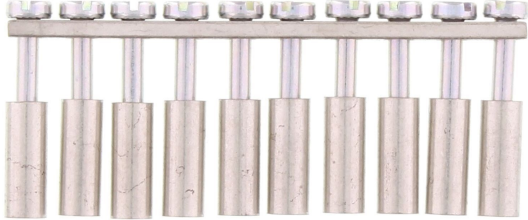

Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2022.0	Q 10	4044211048259	10 ST


---

1019.2

SF 2,5-4 BG

## Accessories


### Insulated cross-connector



Insulated cross-connector, No. of poles: 4,  
Mounting type: Can be screwed on, Width:  
21.9 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2742.2	QI 4 YE	4044211054823	20 ST

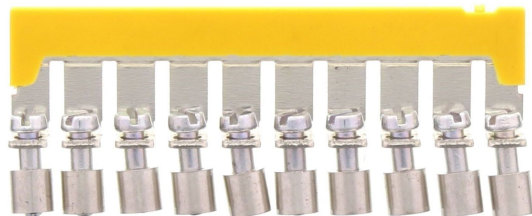

Insulated cross-connector, No. of poles: 10,  
Mounting type: Can be screwed on, Width:  
59.7 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2743.2	QI 10 YE	4044211054830	10 ST



Insulated cross-connector, No. of poles: 2,  
Mounting type: Can be screwed on, Width:  
10.4 mm, Colour: Yellow

#### General order data


Product number:	Article name	Creation date 15.02.2022 22:08:15 Subject to technical changes	GTIN (EAN)	Packaging unit
2740.2	QI 2 YE		4044211054809	50 ST <sup>11</sup>

1019.2

SF 2,5-4 BG

## Accessories

### Insulated cross-connector



Insulated cross-connector, No. of poles: 3,  
Mounting type: Can be screwed on, Width:  
16.5 mm, Colour: Yellow

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2741.2	QI 3 YE	4044211054816	50 ST

## Quick marking



Terminal marker / Pocket Maxicard, Length: 5  
mm, Width: 6 mm, Colour: White

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 ST

1019.2

SF 2,5-4 BG

## Accessories

### Screwdriver




Screwdriver with bare blade, Colour: Black-grey

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 ST

### Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2002.2	TW 2,5-10 BG	4044211048044	50

1019.2

SF 2,5-4 BG

---

## Accessories

---

### Insulation plate

---



Insulation plate, Colour: Beige

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2003.2	TRS 1 BG	4044211048068	100

---