


R413W3680JE00K

Aliases (413W3680JE00K)

R41, Film, Metallized Polypropylene, Safety, 0.68 uF, 10%, 300 VAC (Y2), 1000 VDC, 110°C, Lead Spacing = 37.5mm

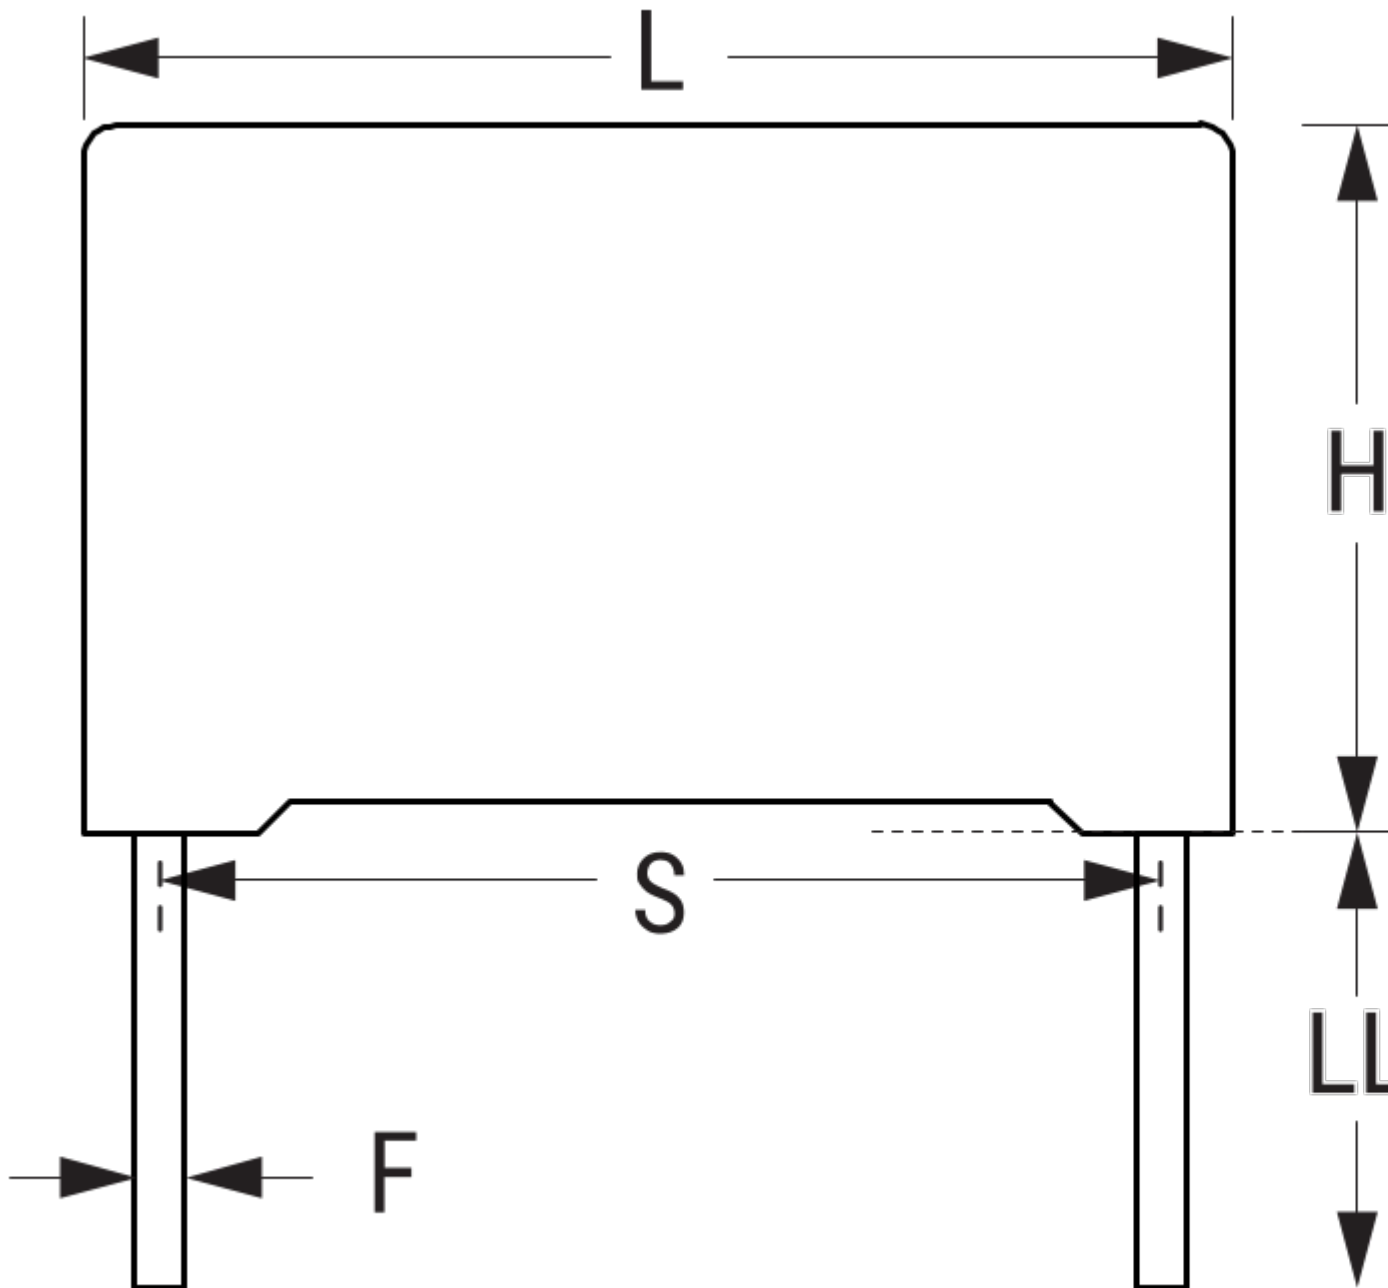

Click [here](#) for the 3D model.

Dimensions

L 41.5mm +0.3/-0.7mm

H 28.5mm +0.1/-0.7mm

Dimensions

T 16mm +0.2/-0.7mm
S 37.5mm +/-0.4mm
LL 4mm +0.5mm
F 1mm +/-0.05mm

Packaging Specifications

Packaging Tray
Packaging Quantity 216

General Information

Series R41
Dielectric Metallized Polypropylene
Style Radial
Features EMI Safety
RoHS Yes
Lead Cut
Safety Class Y2
Qualifications ENEC, UL, cUL, CQC
AEC-Q200 No
THB Performance No
Component Weight 22.71 g

Specifications

Capacitance 0.68 uF
Capacitance Tolerance 10%
Voltage AC 300 VAC (Y2)
Voltage DC 1000 VDC
Temperature Range -40/+110°C
Rated Temperature 110°C
Dissipation Factor 0.2% 1kHz
Insulation Resistance 44.118 GOhms
Max dV/dt 300 V/us

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - e74d0538-653f-4e8b-b685-e160698b6e94
© 2006 - 2023 KEMET
Generated 5/18/2023 - e74d0538-653f-4e8b-b685-e160698b6e94
© 2006 - 2023 KEMET