


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

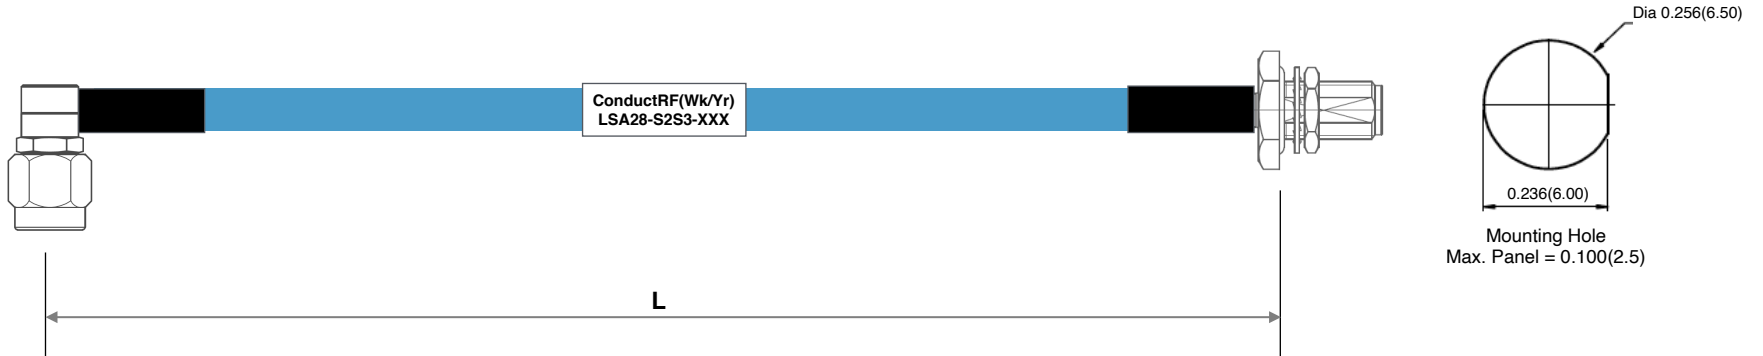

Max. Insertion Loss(dB) Typ.

ConductRF # (XXX)	Length (in.)	6GHz	12GHz	18GHz
S06	6"	0.51	0.74	0.92
S08	8"	0.62	0.90	1.12
S12	12"	0.84	1.22	1.52
S16	16"	1.06	1.53	1.91
S18	18"	1.17	1.69	2.11
S24	24"	1.49	2.17	2.70
S36	36"	2.15	3.12	3.89
S48	48"	2.80	4.07	5.08
S60	60"	3.45	5.02	6.27
VSWR Typ.		1.20:1	1.28:1	1.35:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

5	Label	Shrink Tube	White
4	Strain Relief	Shrink Tube	Black
3	Flexible Spiral Coax	A28SS	Blue FEP
2	SMA Bulkhead Jack	PSF31A-A28G01	Gold
1	SMA R/A Male	PSM21A-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Low Loss 0.086" Flexible SMA R/A M to SMA BKHD				
2	Updated Data Table		DG	10/28/19	Remarks:	Originated: 10/12/15	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA		Sheet 1 of 1
1	Pre-Release		DG	01/04/16		Dwg Ref: LSA28-S2S3				
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2	Part No: LSA28-S2S3-XXX	
REVISION HISTORY										