THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L2	REVISED PER ECO-08-004045	26MAR08	JDP	SLB
	L1	REVISED PER ECO-09-020932	01SEP09	KK	AEG
	L2	ADD PART NUMBER 9-*-1	04MAY17	IT	WH

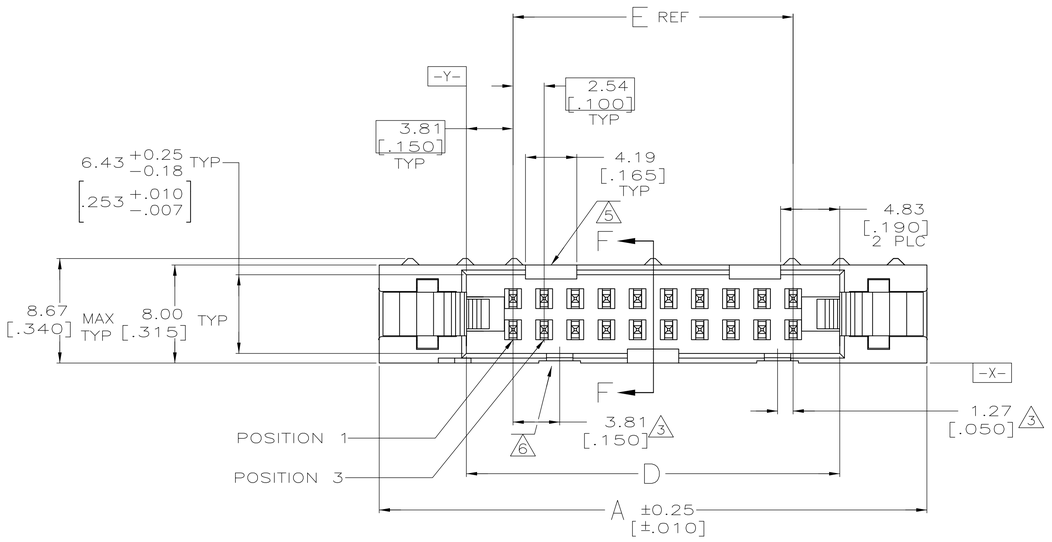

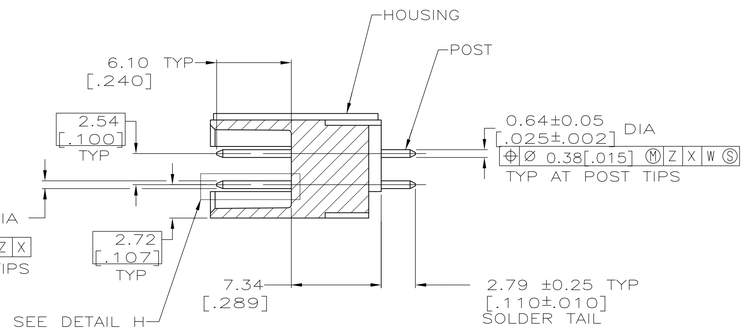

SECTION F–F

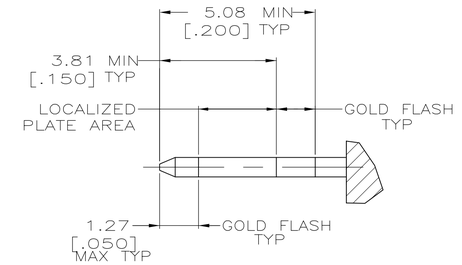

DETAIL V
SCALE 10:1

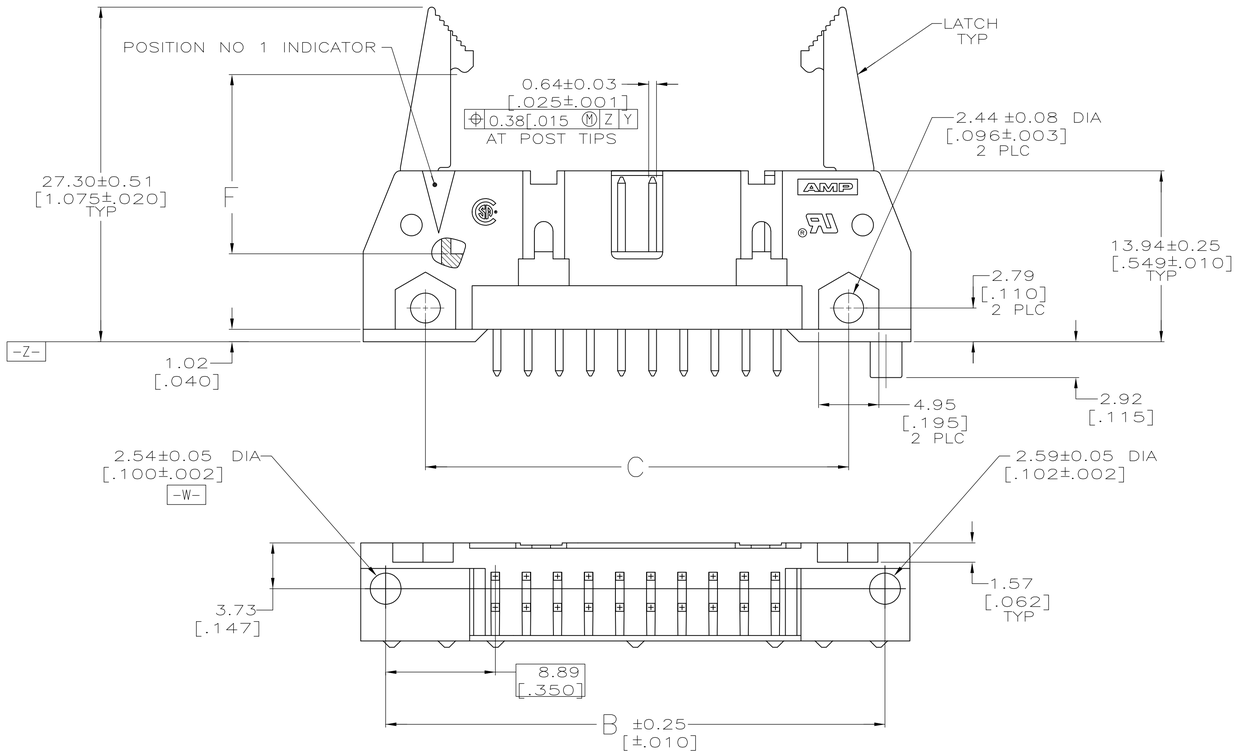

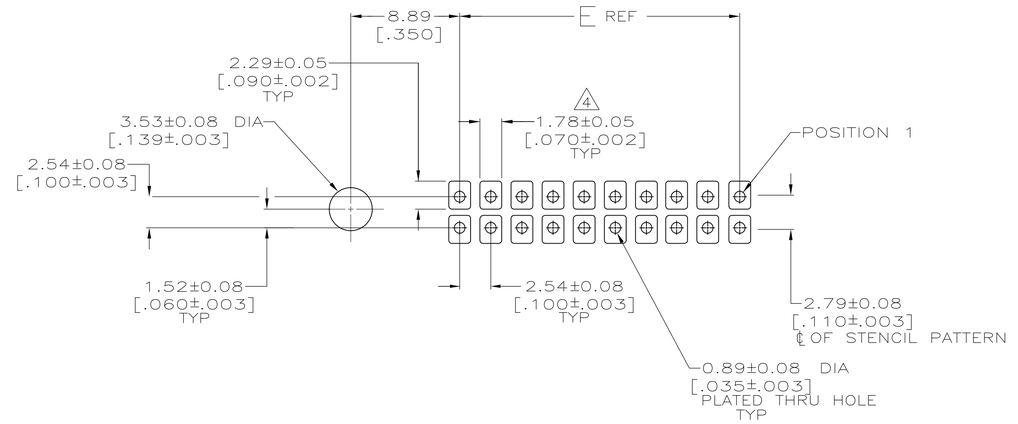

RECOMMENDED
P C BOARD MOUNTING DIMENSIONS

14.25 [.561]	10.16 [.400]	17.78 [.700]	21.84 [.860]	27.94 [1.100]	32.00 [1.260]	10	9-111948-1 8
14.63 [.576]	10.16 [.400]	17.78 [.700]	21.84 [.860]	27.94 [1.100]	32.00 [1.260]	10	111948-1
F	E	D	C	B	A	NUMBER OF POSITIONS	PART NUMBER

1. HOUSING AND LATCHES: POLYESTER, FLAME RETARDANT, UL 94V-0 RATED, GLASS FILLED, RED. POSTS: BRASS OR PHOSPHOR BRONZE.
2. POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76μm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
   -OR-
   0.76μm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
3. COORDINATE DIMENSIONS APPLIES FROM BASIC LOCATION.
4. RECOMMENDED STENCIL THICKNESS EQUALS 0.25 [.010].
5. FOR 10 POSITION HEADER ONLY, ON SLOT LOCATED AS SHOWN.
6. NO SNAP-IN POLARIZING FEATURE ON THIS END FOR 10 POSITION HEADER.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
8. ONLY USED IN WAVE SOLDER PROCESS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1
FINISH 2

DWN C.DORWART 25 JAN 96
CHK R.STONE 29 JAN 96
APVD D.MILLER 30 JAN 96
PRODUCT SPEC 108-40018
APPLICATION SPEC –
WEIGHT 0.000000
CUSTOMER DRAWING

TE Connectivity

NAME UNIVERSAL HEADER, HIGH TEMPERATURE WITH POLARIZATION PIN, AMP-LATCH –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-111948	–

SCALE 4:1 SHEET 1 OF 1 REV L2

4805 (1/15)