



Surge suppressor, Diode combination 30 ... 250 V DC, for contactors Size S2, S3

General technical data			
product brand name		SIRIUS	
product designation		surge suppressor	
size of contactor		S2, S3	
design of the surge suppressor		Diode combination	
ambient temperature			
• during storage	°C	-40 ... +80	
• during operation	°C	-25 ... +60	
Control circuit/ Control			
type of voltage of the control supply voltage		DC	
control supply voltage frequency			
• 1 rated value	Hz	50	
• 2 rated value	Hz	60	
control supply voltage 1			
• at DC	V	30 ... 250	
Installation/ mounting/ dimensions			
mounting position		any	
fastening method		clip-on	
width	mm	30	
height	mm	30	
depth	mm	14.5	
Certificates/ approvals			
certificate of suitability		CE / UL / CSA	
General Product Approval		EMC	Declaration of Conformity



[Confirmation](#)



EG-Konf.

Declaration of Conformity


Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

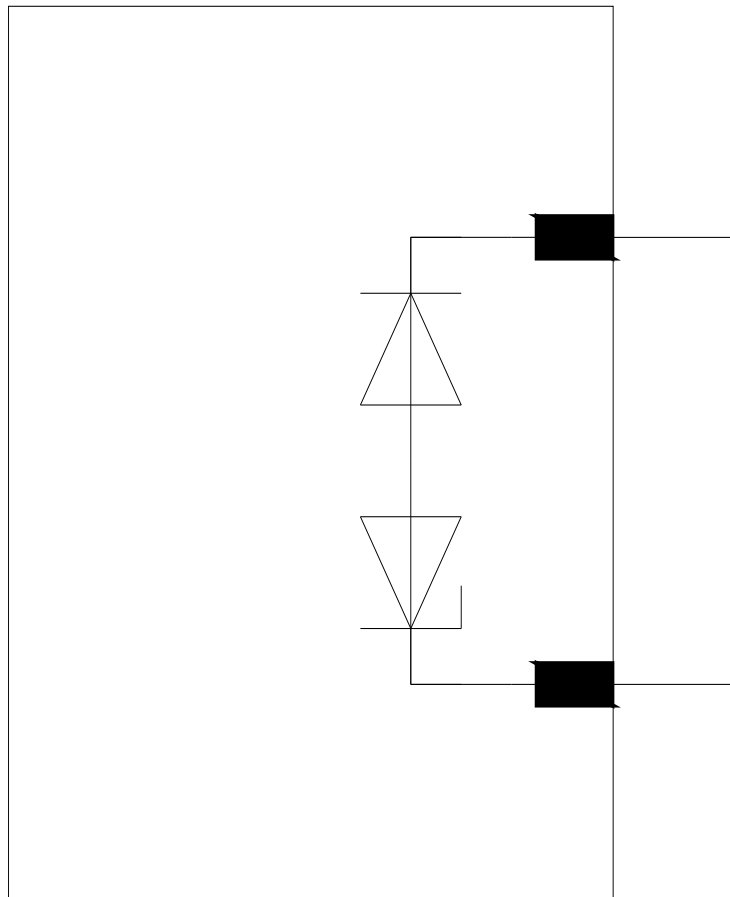

[Confirmation](#)[Environmental Con-
firmations](#)[Vibration and Shock](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2936-1ES00>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2936-1ES00>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3RT2936-1ES00>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2936-1ES00&lang=en

last modified:

4/21/2021