




■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 300VAC Surge input for 5 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP42 design
- 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.8)
- Low cost / High reliability
- 2 years warranty


SPECIFICATION		IP42	LPS	(except for APC-35-350, APC-35-500)		IS 15885 (Part 2/Sec13)	R-41027766	UL	(only for APC-35-700)	UL US	(only for APC-35-1050)	EAC	CE	UK CA	
MODEL		APC-35-350	APC-35-500	APC-35-700	APC-35-1050										
OUTPUT	RATED CURRENT	350mA	500mA	700mA	1050mA										
	DC VOLTAGE RANGE	28~100V	25~70V	15~50V	11~33V										
	RATED POWER	35W	35W	35W	34.7W										
	RIPPLE & NOISE (max.) Note.2	350mVp-p	350mVp-p	350mVp-p	350mVp-p										
	VOLTAGE TOLERANCE Note.3	±5.0%													
	CURRENT ACCURACY	±8.0%													
	LINE REGULATION	±1.0%													
	LOAD REGULATION	±3.0%													
	SETUP, RISE TIME	1500ms, 40ms / 230VAC	1500ms, 40ms / 115VAC	at full load											
HOLD UP TIME (Typ.)	20ms/230VAC	12ms/115VAC	at full load												
INPUT	VOLTAGE RANGE Note.4	90 ~ 264VAC	127 ~ 370VDC												
	FREQUENCY RANGE	47 ~ 63Hz													
	EFFICIENCY(Typ.)	84%	84%	84%	84%										
	AC CURRENT	0.5A/230VAC; 0.75A/115VAC													
	INRUSH CURRENT(Typ.)	COLD START 45A(twidth=490µs measured at 50% Ipeak) at 230VAC													
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	5 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC													
LEAKAGE CURRENT	0.25mA / 240VAC														
PROTECTION	OVER VOLTAGE	110 ~ 130V	77 ~ 91V	55 ~ 65V	36 ~ 43V	Protection type : Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	-30 ~ 70°C (Refer to "Derating Curve")													
	WORKING HUMIDITY	20 ~ 90% RH non-condensing													
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH													
	TEMP. COEFFICIENT	±0.2%/°C (0 ~ 50°C)													
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes													
SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL8750 (only for APC-35-700&1050), CSA-C22.2 No. 250.0-13 (only for APC-35-1050), BIS IS15885, EAC TP TC 004, IP42 approved; design refer to BS EN/EN 62368-1													
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC													
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH													
	EMC EMISSION	Compliance to BS EN/EN55032, BS EN/EN61000-3-2 Class A, BS EN/EN61000-3-3, EAC TP TC 020													
	EMC IMMUNITY	Compliance to BS EN/EN55024, BS EN/EN61000-4-2,3,4,5,6,8,11; light industry level(surge 2KV), criteria A, EAC TP TC 020													
OTHERS	MTBF	518.9K hrs min. MIL-HDBK-217F (25°C)													
	DIMENSION	84*57*29.5(L*W*H)													
	PACKING	0.18Kg; 72pcs/14Kg/0.92CUFT													
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the static characteristic for more details.</p> <p>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <p>6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>7. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf</p> <p>8. This product is not intended for LED lighting luminaire applications in the EU.(In the EU the LPF/NPF/XLG series are recommended.)</p> <p>9. To fulfill requirements of latest ErP regulation for lighting luminaires, this LED Driver can only be used behind a switch without permanently connected to mains.</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>														

Mechanical Specification


Case No.PCD16A Unit:mm

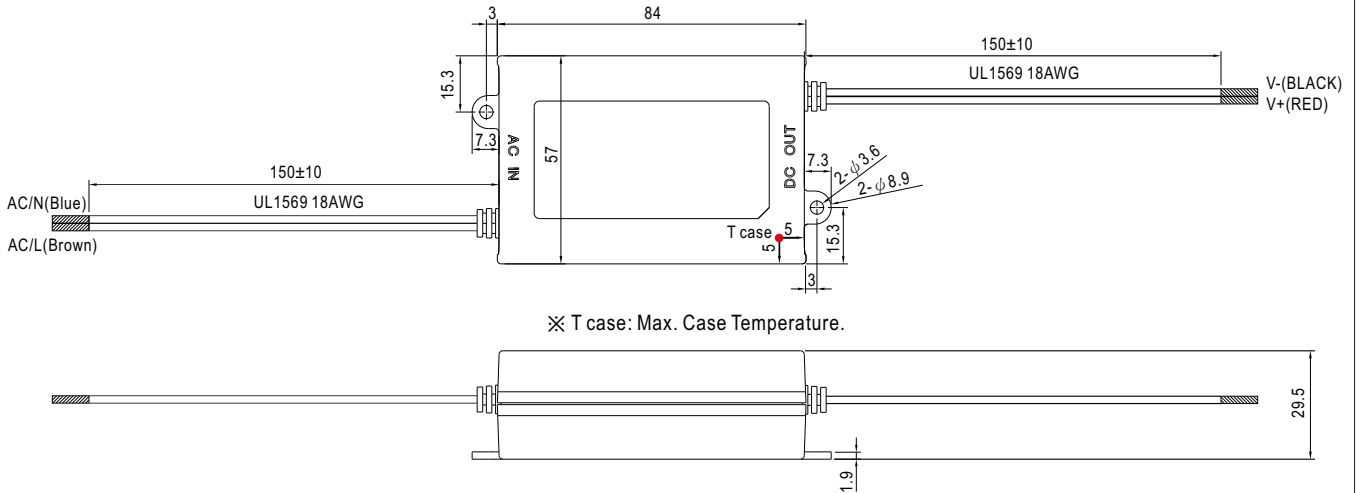

Block Diagram

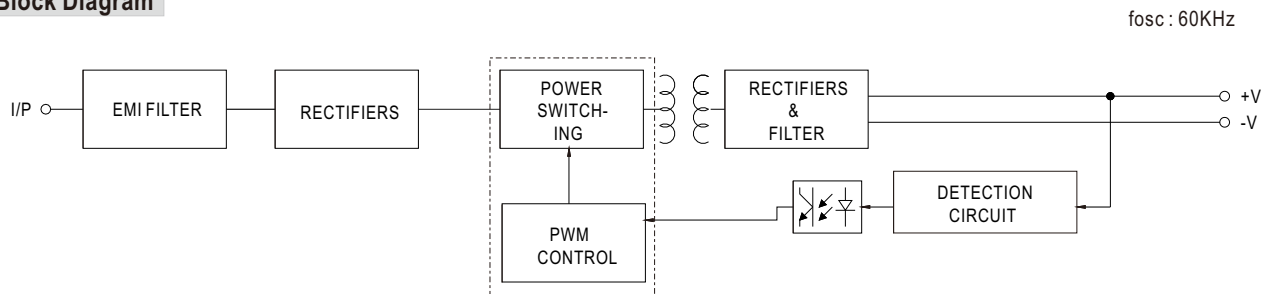

Derating Curve

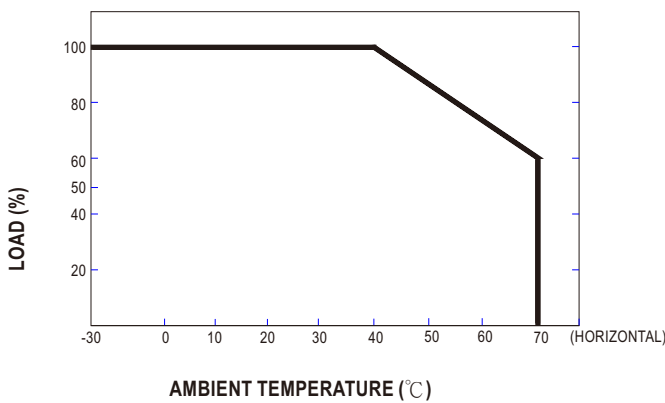

Static Characteristics

