


WIRING DIAGRAM

LUMBERG 12 CCT CRADLE CONNECTOR	12 CORE CABLE COLOUR	LUMBERG 12 CCT CONNECTOR	SIGNAL NAME
1	BROWN	1	GND
2	GREY	2	SB
3	RED	3	POWER
4	PURPLE	4	BATT+
5	YELLOW	5	YX
6	ORANGE	6	RX
7	BLUE	7	ZUB_CLK
8	GREEN	8	ZUB_DATA
9	BLACK	9	GND_MIC
10	WHITE	10	HF_MIC
11	TAN	11	AUDIO
12	PINK	12	CMDA

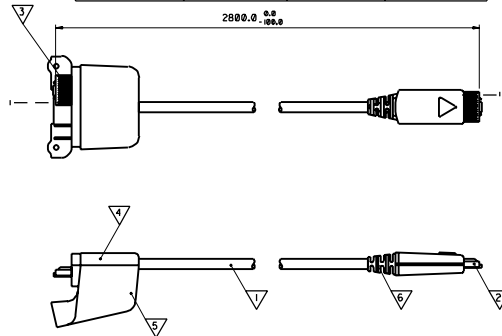

BILL OF MATERIALS

NO.	QTY	SUPPLIER	DESCRIPTION	EDP No.	NOTE
1	1	MOLEX	12 CORE CABLE	99036-0174	1, 4, 6
2	1	LUMBERG	12 POSITION PLUG INCLUDES: SHELLS & CONNECTOR	8834C25	1, 2, 3, 6
3	1	LUMBERG	12 CCT CAR CRADLE CONNECTOR AND STRAIN RELIEF	8836525	1, 2, 3, 6
4	1	BEBEUSH	UPPER SHELL	C39158-A23-C6	2, 3, 6
5	1	BEBEUSH	LOWER SHELL	C39158-A23-C7	2, 3, 6
6	1	MOLEX	GROMMET	99038-0085	6

ORIGINAL RELEASE
2000-0830
DRYAN 0003/10
///
///

▽ CABLE SPECIFICATION

1. CABLE TYPE: FLAT RIBBON ROUND OTHER
 SPIRAL CABLE YES NO
 NO. OF CONDUCTORS 12

2. CABLE REQUIREMENTS: CABLE MUST UNWIND FROM REEL WITH ORIENTATION AS PER DIAGRAM BELOW

3. CONDUCTOR SPECIFICATIONS:

	CONDUCTOR NO.	
	1 - 2	3 - 12
CONDUCTOR 1		
- MATERIAL	TINNED CU	TINNED CU
- A.W.G.	26	30
- STRANDING QTY/GUAGE	7/34	7/38
- TENSILE STRENGTH	N/A	N/A
INSULATION 1		
- MATERIAL	PVC	PVC
- NOM. WALL THICKNESS	0.19	0.19
- COLOUR	SEE CABLE DIAGRAM/COLOUR CODE	
- OUTSIDE DIAMETER	0.66 ± 0.03	0.68 ± 0.03
- DIRECTION OF LAY	Z	S
- LENGTH OF LAY	N/A	N/A
- U.L. RATING	N/A	N/A

4. FILLER: ENOUGH TO MAKE CABLE ROUND

5. SEPARATOR: TYPE TALC

6. CABLE JACKET:

TYPE	PVC (FLAME RETARDANT PVC USED)
FINAL DIAMETER	0.68 ± 0.10
NOM. THICKNESS	0.85
COLOUR	BLACK
FINISH	MATT
U.L. RATING	N/A
HARDNESS	TBD
STRIPABILITY	N/A
MARKINGS	NONE
FLAME RATING	UL 1100 HORIZONTAL SPECIMEN / FT2 TO REFERENCE STANDARD UL 1581

CONDUCTOR 1 (1-2) and **CONDUCTOR 2** (3-12) are shown in a circular cross-section diagram with labels for SEPARATOR and FILLER. SCALE 10:1.

COLORS:
 1. BROWN
 2. RED
 3. WHITE
 4. BLACK
 5. GREEN
 6. BLUE
 7. ORANGE
 8. YELLOW
 9. PURPLE
 10. GREY
 11. TAN
 12. PINK

NOTES:

- CABLE CONDUCTORS AND TERMINALS COVERED WITH HEAT SHRINK INSULATION TUBING ON LUMBERG CONNECTORS.
- SHELLS OF LUMBERG CONNECTORS ULTRASONICALLY WELDED.
- SUPPLIER OR CUSTOMER APPROVED EQUIVALENT.
- ONLY AVAILABLE FROM MOLEX AS PART OF A HARNESS ASSEMBLY.
- ASSEMBLIES TESTED FOR SHORTS AND DISCONTINUITIES BETWEEN ALL CIRCUITS.
- PARTS TO BE TESTED ACCORDING TO THE SIEMENS SPECIFICATION A24051-A1-A33-54-7624.

1 : 1 * *
 D. RYAN 00/03/10
 BENRICH 00/03/10
 MWILHITE 00/03/10

CAR KIT COMFORT

1/2

92601-0075 SD-92601-146 1 OF 1

92601-0075
SD-92601-146

SHT. 1 OF 1				MRI- SD-92601-146	
MODIFICATION RECORD INDEX					
ECN	ISS.	DATE	INIT.	SHTS. AFFECTED	DESCRIPTION OF MOD.
E2000-0080	A	00.03.10	DR	1	ORIGINAL RELEASE
			REVISE ONLY ON CAD SYSTEM		
MOLEX EUROPE			ISSUE		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. IT SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			CAD/CAM FILENAME		A

LEVEL CHART

1	17	33	49
2	18	34	50
3	19	35	51 LEVEL INDEX
4	20	36	52 RESERVED
5	21	37	53 RESERVED
6	22	38	54 Inspect Ion Ball looms
7	23	39	55 DIMENSIONS
8	24	40	56 TABLES/CHARTS
9	25	41	57 REVISION TEXT & MRI
10	26	42	58 Notes/text - English
11	27	43	59 Bill of Materials
12	28	44	60 Notes/text - German
13	29	45	61
14	30	46	62 Notes/text - French
15	31	47	63 RESERVED
16	32	48	