


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to 18GHz w. factory stored Hi-Point data.
4. Orientation of Connectors $\pm 5^\circ$

ConductRF(Wk/Yr)
FMA28-S2S2-XXX

Marker Example

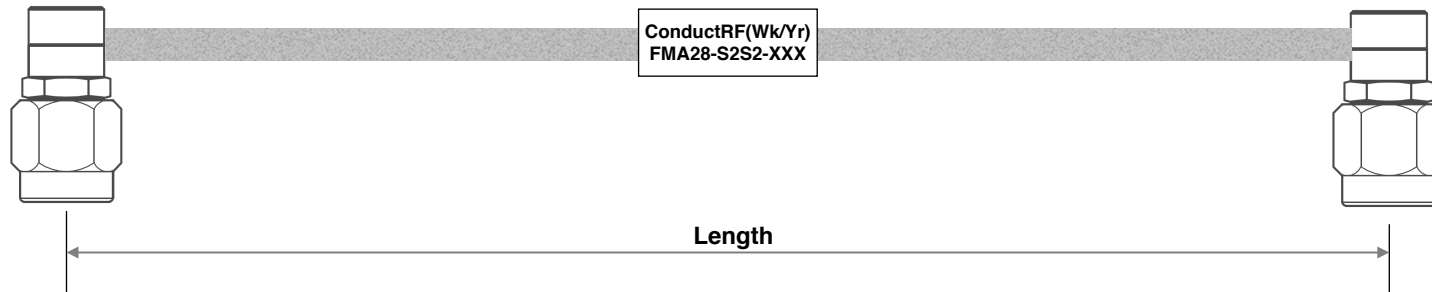


Length	XXX	Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
6"	S06	0.51	0.74	0.92
8"	S08	0.62	0.90	1.12
12"	S12	0.84	1.22	1.52
16"	S16	1.06	1.54	1.92
18"	S18	1.17	1.70	2.13
24"	S24	1.50	2.18	2.73
36"	S36	2.16	3.15	3.94
48"	S48	2.82	4.11	5.15
60"	S60	3.48	5.08	6.36
VSWR(Max)		1.25:1		1.35:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
SXX = Length in Inches (eg S18=18")
XXM = Length in Meters (eg 2M5=2.5m)
CXX = Length in CM (eg C50=50cm)

4	Label	SM3-23 1/4" 3:1	White
3	Hand Form	A28CF	Tinned
2	SMA R/A Male	PSM21A-A28G01	Pass. SS
1	SMA R/A Male	PSM21A-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: SMA R/A Male to R/A Male 0.086" Hand Form Cable			
1	Pre-Release		DG	09/23/20	Remarks: 035/035/5	Originated: 09/23/20	Conduct RF sales@ConductRF.com Tel: +1 978 374 684	Range: FMA Sheet 1 of 1	
REVISION HISTORY					Length Tolerances: $\leq 24" = \pm 0.25"$ $> 24" = \pm 1\%$	Checked: JW	Approved: PL	Rev: 1	Part No: FMA28-S2S2-XXX