

HSE18L-N4A5BA

SureSense

HYBRID PHOTOELECTRIC SENSORS





Ordering information

Туре	Part no.
HSE18L-N4A5BA	1074778

Other models and accessories → www.sick.com/SureSense

Illustration may differ



Detailed technical data

Features

Sensor/ detection principle	Through-beam photoelectric sensor
Dimensions (W x H x D)	16.2 mm x 48.5 mm x 31.8 mm
Housing design (light emission)	Hybrid
Thread diameter (housing)	M18
Mounting system type	M18, nose / side (24 24.5 mm)
Housing color	Blue
Sensing range max.	0 m 60 m
Sensing range	0 m 50 m
Type of light	Visible red light
Light source	Laser 1) 2)
Light spot size (distance)	2 mm (1.5 m)
Wave length	655 nm
Laser class	I .
Adjustment	
Potentiometer, right	None
Potentiometer, left	None
Special applications	Detecting small objects
Special features	Signal strength light bar

 $^{^{1)}}$ Average service life: 50,000 h at $\rm T_U$ = +25 °C.

²⁾ CLASS 1 LASER PRODUCT EN60825-1:2014, IEC60825-1:2014, Maximum pulse power < 2,5 mW, Pulse length: 4 μs, Wavelength: 650 ... 670 nm, Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

Mechanics/electronics

Supply voltage	10 V DC 30 V DC
Ripple	< 5 V _{pp} ¹⁾
Power consumption	20 mA ²⁾
Switching output	NPN
Output function	Complementary
Switching mode	Light/dark switching
Switching output detail	
Switching output Q1	NPN, Light switching
Switching output Q2	NPN, Dark switching
Output current I _{max.}	≤ 100 mA
Response time	≤ 0.5 ms ³⁾
Switching frequency	1,000 Hz ⁴⁾
Connection type	Male connector M12, 4-pin
Circuit protection	A ⁵⁾ B ⁶⁾ D ⁷⁾
Protection class	III ⁸⁾
Weight	18 g
Housing material	Plastic, VISTAL®
Optics material	Plastic, PMMA
Enclosure rating	IP67 IP69K
EMC	EN 60947-5-2 (The sensor complies with the Radio Safety Requirements (EMC) for the industrial sector (Radio Safety Class A). It may cause radio interference if used in a residential area.)
Ambient operating temperature	-30 °C +55 °C ⁹⁾
Ambient storage temperature	-40 °C +70 °C
UL File No.	E189383

 $^{^{1)}\,\}mathrm{May}$ not exceed or fall below U_{V} tolerances.

Classifications

ECI@ss 5.0	27270904
ECI@ss 5.1.4	27270904
ECI@ss 6.0	27270904
ECI@ss 6.2	27270904
ECI@ss 7.0	27270904
ECI@ss 8.0	27270904

 $^{^{2)}}$ Without signal strength light bar and load.

 $^{^{\}rm 3)}$ Signal transit time with resistive load.

⁴⁾ With light/dark ratio 1:1.

 $^{^{5)}}$ A = $\rm V_{S}$ connections reverse-polarity protected.

⁶⁾ B = inputs and output reverse-polarity protected.

 $^{^{7)}}$ D = outputs overcurrent and short-circuit protected.


⁸⁾ Reference voltage: 50 V DC.


 $^{^{9)}}$ Below Ta = -10 $^{\circ}$ C, sensor must be turned on at Ta > -10 $^{\circ}$ C. Sensor cannot be turned on below Ta= -10 $^{\circ}$ C.

HYBRID PHOTOELECTRIC SENSORS

ECI@ss 8.1	27270904
ECI@ss 9.0	27270904
ETIM 5.0	EC002719
ETIM 6.0	EC002719
UNSPSC 16.0901	39121528

Dimensional drawing (Dimensions in mm (inch))

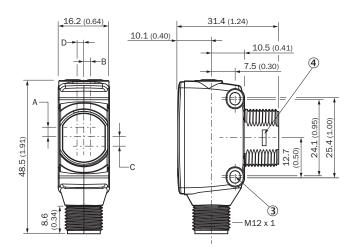




- ① LED indicator yellow: Status of received light beam
- ② LED indicator green: power on
- 3 M3 mounting hole
- 4 Snap Connection for flush ring (sold seperatly)
- ⑤ Potentiometer (if selected) or LED Indicators

Dimensions in mm (inch)	Receiver		Sender	
	A	В	С	D
HTB18 / HTF18	- 1.1 (0.04)	1.1 (0.04)	4.7 (0.19)	0.6 (0.02)
HTE18 / HL18 / HSE18	2.5 (0.1)	0.0 (0.0)	4.0 (0.16)	0.0 (0.0)
HTB18L / HTF18L / HL18L / HSE18L	2.5 (0.1)	0.0 (0.0)	3.5 (0.14)	0.0 (0.0)

Adjustments possible



- ① LED indicator yellow: Status of received light beam
- ② LED indicator green: power on
- 3 Signal strength light bar


Connection diagram

Cd-431


- ① Sender
- ② Receiver

Characteristic curve

Operating reserve

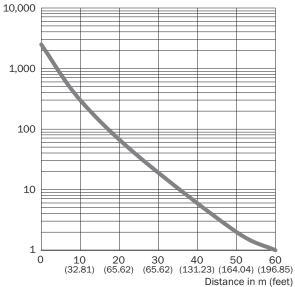

Light spot size

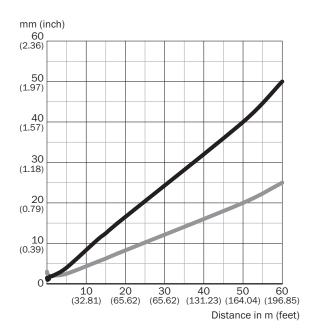


Dimensions in mm (inch)


Sensing range	Vertical	Horizontal
0.3 m	1.2	2.2
(0.98 feet)	(0.05)	(0.09)
1.5 m	2.0	2.0
(4.92 feet)	(0.08)	(0.08)
18 m	15.0	7.5
(59.06 feet)	(0.59)	(0.30)
60 m	50.0	25.0
(196.85 feet)	(1.97)	(0.98)

Vertical
Horizontal

Sensing range diagram



Functions

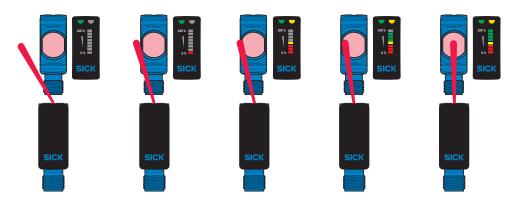

Recommended accessories

Other models and accessories → www.sick.com/SureSense

	Brief description	Туре	Part no.			
Mounting brackets and plates						
	Mounting plate for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WG-M18	5321870			
40	Mounting bracket for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WN-M18	5308446			
	Bottom M18 mounting bracket SureSense sensors	MB-M18-H18	2085820			
Other mounti	Other mounting accessories					
	Spherical bearing M18	Ball holder	4057409			
	Mounting bracket	MB-BS18MM-M4	2049694			
Terminal and	Terminal and alignment brackets					
	Clamping block for round sensors M18, without fixed stop, plastic (PA12), glass-fiber reinforced, mounting hardware included $\frac{1}{2} \frac{1}{2} \frac{1}{2}$	BEF-KH-M18	2051481			
Plug connect	Plug connectors and cables					
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A14- 050VB3XLEAX	2096235			
	Head A: male connector, M12, 4-pin, straight Head B: - Cable: unshielded	STE-1204-G	6009932			

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

