SIEMENS

Data sheet

3RA2115-0HD15-1BB4

	Fuseless motor starter Direct start 600VAC Size S00 0.55-0.8A 24V DC screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor)
product brand name	SIRIUS
product designation	non-fused motor starter 3RA2
design of the product	direct starter
manufacturer's article number	
 of the supplied contactor 	3RT2015-1BB41
 of the supplied circuit-breakers 	3RV2011-0HA15
 of the supplied busbar adapter 	<u>8US1251-5DS10</u>
of the supplied link module	3RA1921-1DA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	30 000 000
type of assignment	2
Ambient conditions	-
ambient temperature	
during operation	-20 +60 °C
during operation during storage	-50 +80 °C
during storage during transport	-55 +80 °C
Main circuit	-55 100 C
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-	0.55 0.8 A
	0.00 0.0 A
dependent overload release	
dependent overload release operating voltage	
•	690 V
operating voltage	690 V 690 V
operating voltage • rated value	
operating voltagerated valueat AC-3 rated value maximum	690 V
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	690 V 50 60 Hz
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value	690 V 50 60 Hz
operating voltage	690 V 50 60 Hz 0.6 A
operating voltage	690 V 50 60 Hz 0.6 A
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value	690 V 50 60 Hz 0.6 A 180 W 250 W
operating voltage	690 V 50 60 Hz 0.6 A 180 W 250 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control	690 V 50 60 Hz 0.6 A 180 W 250 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W
operating voltage	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W
operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions trip class	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W
operating voltage	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W
operating voltage	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W CLASS 10 thermal (bimetallic)
operating voltage	690 V 50 60 Hz 0.6 A 180 W 250 W 370 W 24 V 4 W CLASS 10 thermal (bimetallic)

design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
 at 690 V according to IEC 60947-4-1 rated value 	100 000 A
 at 400 V according to IEC 60947-4-1 rated value 	153 000 A
 at 500 V according to IEC 60947-4-1 rated value 	100 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	for snapping onto 60 mm busbar systems
height	200 mm
width	45 mm
depth	155.1 mm
required spacing	
 for grounded parts 	
— forwards	0 mm
— backwards	0 mm
— upwards	20 mm
— at the side	9 mm
— downwards	10 mm
• for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	20 mm
— downwards	10 mm
— at the side	9 mm
Connections/ Terminals	
type of electrical connection for main current circuit	screw-type terminals
type of connectable conductor cross-sections for main contacts stranded	0.5 4 mm², 2x (0.75 2.5 mm²)
connectable conductor cross-section for main contacts finely stranded with core end processing	0.5 2.5 mm²
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures with high demand rate according to SN 31920	73 %
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Certificates/ approvals	
General Product Approval	For use in hazard- ous locations Declaration of Conformity

Confirmation











Test Certificates

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate









Marine / Shipping





Confirmation

other

Vibration and Shock

Railway

Transport Information

Dangerous Good

Further informatio

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-0HD15-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-0HD15-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0HD15-1BB4

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2115-0HD15-1BB4&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0HD15-1BB4/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-0HD15-1BB4&objecttype=14&gridview=view1

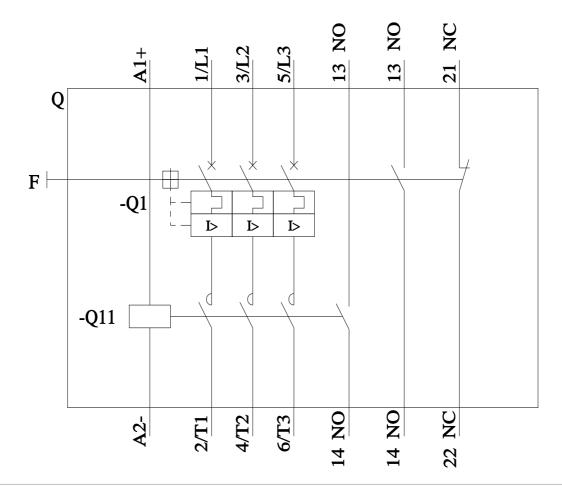

12/15/2020 last modified: