DSCA43









General Purpose Input Signal Conditioners, with DC Excitation

Description

Each DSCA43 general purpose input module provides a single channel of transducer input which is filtered, isolated, amplified, and converted to a high-level voltage output (Figure 1). Signal filtering is accomplished with a fivepole filter which is optimized for step response. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

Transducer excitation is provided from the module by a stable 10V source. This source is fully isolated, allowing the amplifier inputs to operate over the full range of the excitation voltage. This feature enables the module to be interfaced to a wide variety of sensors requiring exctitation.

Module output is either voltage or current. For current output models a dedicated loop supply is provided at terminal 3 (+OUT) with loop return located at terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide signal input and excitation protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Signal and power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration, however, zero and span settings are adjustable up to ±5% to accommodate situations where fine-tuning is desired. The adjustments

Features

- Interfaces to Transducers and Other Devices Requiring a Stable, Isolated DC Supply
- Industry Standard Output of 0 to +10V, ±10V, 0 to 20mA, or 4 to 20mA
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 240VAC Continuous
- True 3-Way Isolation
- Wide Range of Supply Voltage
- 100dB CMR
- Fully Isolated Excitation Supply
- ±0.03% Accuracy
- ±0.01% Linearity
- Easily Mounts on Standard DIN Rail
- C-UL-US Listed
- CE and ATEX Compliant

are made using potentiometers located under the front panel label and are non-interactive for ease of use.

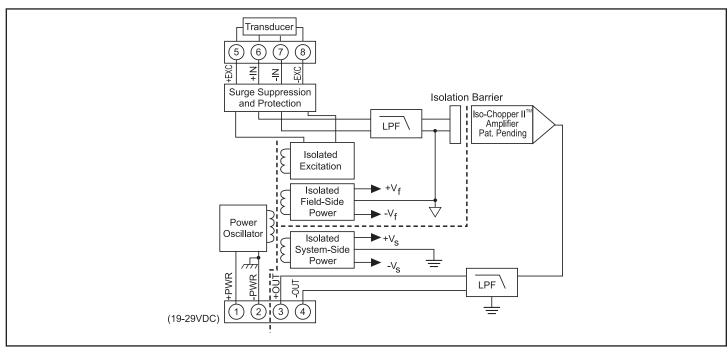


Figure 1: DSCA43 Blok Diagram



Specifications Typical* at T_A = +25°C and +24VDC supply voltage

Specifications Typical at 1	A 120 C and 121120 cappily voltage
Module	DSCA43
Input Range Input Bias Current Input Resistance Normal Power Off Overload Signal Input Protection Continuous Transient	±1V to ±10V ±0.05nA >500kΩ >500kΩ >500kΩ 240Vrms max ANSI/IEEE C37.90.1
Excitation Output Voltage (–EXC to +EXC) Output Current Load Regulation Stability Protection Continuous Transient	10V ± 0.03% 40mA maximum ±5ppm/mA ±15ppm/°C 240Vrms max ANSI/IEEE C37.90.1
Output Range Load Resistance (I _{OUT}) Current Limit Output Protection Short to Ground Transient CMV, Input to Output, Input to Power Continuous Transient CMV, Output to Power Continuous CMR (50Hz or 60Hz)	See Ordering Information 600Ω max 8mA (V _{OUT}), 30mA (I _{OUT}) Continuous ANSI/IEEE C37.90.1 1500Vrms max ANSI/IEEE C37.90.1 50VDC max 100dB
Accuracy ⁽¹⁾ Linearity Adjustability Stability Input Offset Output Offset Gain Output Noise, 100kHz Bandwidth	±0.03% Span ±0.01% Span ±5% Zero and Span ±5μV/°C ±6ppm/°C (V _{OUT}), ±20ppm/°C (I _{OUT}) ±55ppm/°C 500μVrms (V _{OUT}), 2μArms (I _{OUT})
Bandwidth, –3dB NMR Response Time, 90% Span	3kHz 100dB per Decade above 3kHz 170µs
Power Supply Voltage Current Sensitivity Protection Reverse Polarity Transient	19 to 29VDC 60mA (V _{OUT}), 80mA (I _{OUT}) +0.0002% % Continuous ANSI/IEEE C37.90.1
Mechanical Dimensions (h)(w)(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)
Mounting	DIN EN 50022 -35x7.5 or -35x15 rail
Environmental Operating Temperature Range Storage Temperature Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT	-40°C to +80°C -40°C to +80°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B

(1) Includes linearity, hysteresis and repeatability.

Ordering Information

Model	Input Range	Output Range †
DSCA43-01	-1V to +1V	1
DSCA43-02	-2V to +2V	1
DSCA43-03	-3V to +3V	1
DSCA43-04	-4V to +4V	1
DSCA43-05	-5V to +5V	1
DSCA43-06	-6V to +6V	1
DSCA43-07	-7V to +7V	1
DSCA43-08	-8V to +8V	1
DSCA43-09	-9V to +9V	1
DSCA43-10	-10V to +10V	1
DSCA43-11	-1V to +1V	2, 3, 4
DSCA43-12	-2V to +2V	2, 3, 4
DSCA43-13	-3V to $+3V$	2, 3, 4
DSCA43-14	-4V to +4V	2, 3, 4
DSCA43-15	-5V to +5V	2, 3, 4
DSCA43-16	-6V to +6V	2, 3, 4
DSCA43-17	-7V to +7V	2, 3, 4
DSCA43-18	-8V to +8V	2, 3, 4
DSCA43-19	-9V to +9V	2, 3, 4
DSCA43-20	-10V to +10V	2, 3, 4

†Output Ranges Available

Output Range	Part No. Suffix	Example
110V to +10V	NONE	DSCA43-01
2. 0V to +10V	NONE	DSCA43-11
3. 4 to 20mA	С	DSCA43-11C
4. 0 to 20mA	Е	DSCA43-11E

Installation Notes:

- 1.) This Equipment is Suitable for Use in Class I, Division 2, Groups A, B,C, D, or Non-Hazardous Locations Only.
- 2.) WARNING Explosion Hazard Substitution of Components May Impair Suitability for Class I, Division 2.
- 3.) WARNING Explosion Hazard Do Not Disconnect Equipment Unless Power Has Been Switched Off or The Area is Known to be Non-Hazardous.
- 4.) The Power to These Devices Shall Be Limited By an Over-Current Protection Device, UL Certified Fuse (JDYX/JDYX2) Rated 6A Max.

^{*}Contact factory or your local Dataforth sales office for maximum values.