






400-2500 MHz Lowpass Filter

Part Number: AE2500L8901

Specifications (Based on 1.05pF Pad Capacitance Input and Output)

- Passband: 400-2500 MHz
- Passband Insertion Loss: <1dB
- Passband Ripple: <.25 dB
- Passband Return Loss: Input: >15 dB  
Output: >15 dB
- Rejection: 3350-3650 MHz >45 dB  
4100-6000 MHz >70 dB
- Max Power: 20 dBm
- Operating Temperature: -40 to +110°C

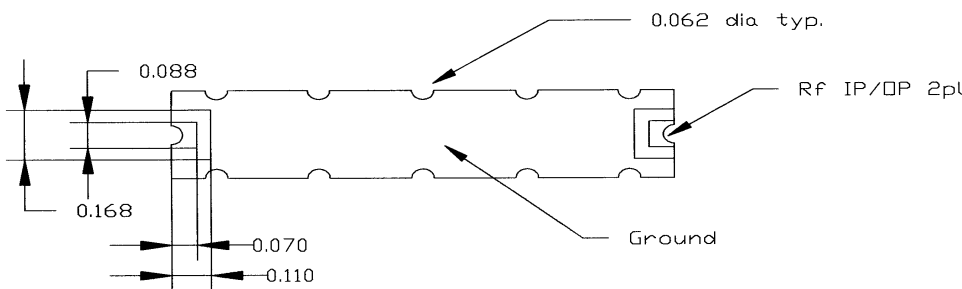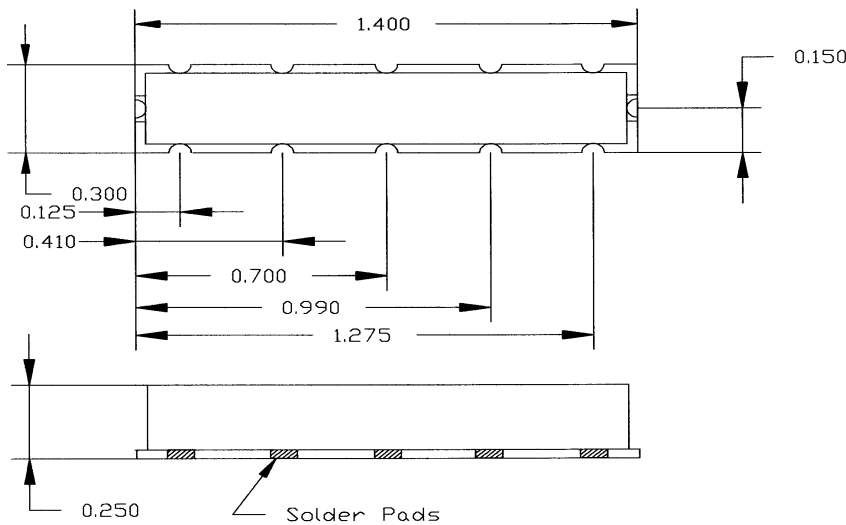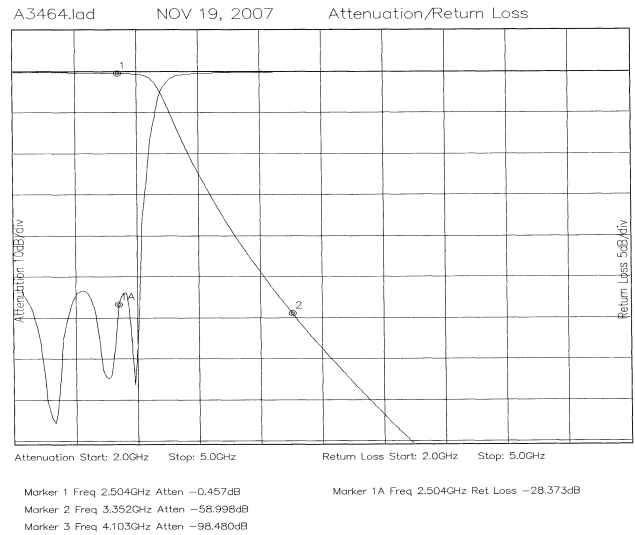

988987 ajs 11/29/07  
 Outline Drawing  
 Anatech Electronics Inc.