

Inductors for power circuits **Wound metal SPM** series









SPM6550CT type













FEATURES

- O Magnetic shield type wound inductor for power circuits using a metallic magnetic material.
- Ocompared to ferrite wound type inductors, it is possible to achieve large current, low Rdc, and compactness.
- O Low inductance variance in high-temperature environments with good DC superimposition characteristics.
- OMetallic magnetic material is used, and the structure has an integrated molded coil, so hum noise is lower than with core adhesive coils.
- Ocompared with the conventional SPM series, it has a high Q characteristic in the high frequency region, so low loss can be realized in the high frequency region.

APPLICATION

ONote PCs, HDDs, servers, VRMs, compact power supply modules, other

PART NUMBER CONSTRUCTION



CHARACTERISTICS SPECIFICATION TABLE

L		Measuring frequency	DC resistance	ce	Rated current*		Part No.
(uH)	Tolerance	(kHz)	(mΩ)max.	(mΩ)typ.	Isat (A)typ.	Itemp (A)typ.	
(μH)	TOTELATICE	(KI 12)	(IIIS2)IIIax.	(IIISZ)typ.	(A)typ.	(A)typ.	
0.33	+/-15%	100	2.86	2.60	25.2	17.0	<u>SPM6550CT-R33L</u>
0.50	+/-15%	100	4.29	3.90	20.4	13.2	SPM6550CT-R50L

^{*} Rated current: smaller value of either lsat or Itemp.

Isat: When based on the inductance change rate (20% below the initial value)

Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

Measurement equipment

Measurement item	Product No.	Manufacturer	
L	4284A	Keysight Technologies	
DC resistance	AX-111A	ADEX	
Rated current Isat	4284A+42841A+42842C	Kevsight Technologies	

^{*} Equivalent measurement equipment may be used.

■TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range*	Storage temperature range**	Individual weight
-40 to +125 °C	−40 to +125 °C	1.10 g

^{*} Operating temperature range includes self-temperature rise.






[·] The cleaning agent can not be used for these products.

^{**} The storage temperature range is for after the assembly.



SPM6550CT type

L FREQUENCY CHARACTERISTICS

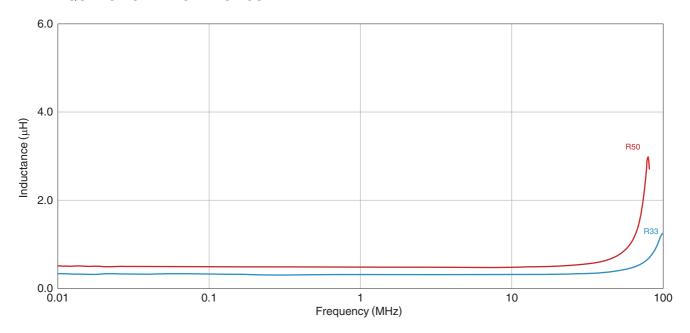


Measurement equipment

Product No.	Manufacturer
4294A	Keysight Technologies

^{*} Equivalent measurement equipment may be used.

■INDUCTANCE VS. DC BIAS CHARACTERISTICS

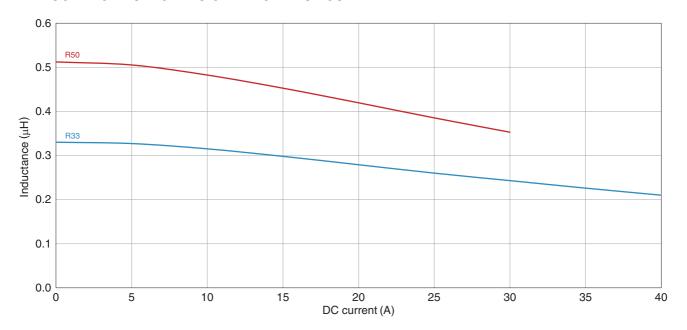

Measurement equipment


Product No.	Manufacturer
4284A+42841A+42842C	Keysight Technologies

^{*} Equivalent measurement equipment may be used.



SPM6550CT type

Q FREQUENCY CHARACTERISTICS

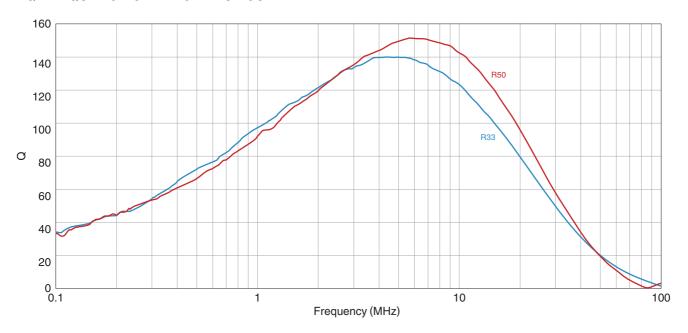

Measurement equipment


Product No.	Manufacturer
4294A	Keysight Technologies

^{*} Equivalent measurement equipment may be used.




SPM6550CT type

■SHAPE & DIMENSIONS

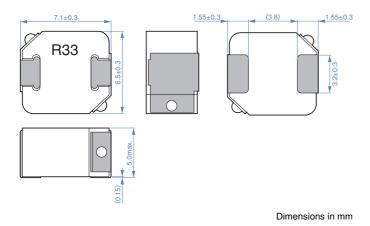


■ PACKAGING STYLE

□REEL DIMENSIONS




Dimensions in mm

■ RECOMMENDED LAND PATTERN




TAPE DIMENSIONS



Dimensions in mm

Туре	Α	В	K
SPM6550CT	7.4	7.6	5.0

■ RECOMMENDED REFLOW PROFILE



□PACKAGE QUANTITY

Package quantity	1000 pcs/reel



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

REMINDERS The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. O Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. Use a wrist band to discharge static electricity in your body through the grounding wire. On not expose the products to magnets or magnetic fields. O Do not use for a purpose outside of the contents regulated in the delivery specifications. The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society,

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment

person or property.

(4) Power-generation control equipment

set forth in the each catalog, please contact us.

- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions