

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 48 V AC

#### Your advantages

- ☑ Plugs can be checked with CHECKMASTER
- ☑ Installed in conjunction with the PT 4x1...-BE base element
- Maximum ease of maintenance thanks to the two-piece design
- ☑ Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Protection for four conductors with common reference potential
- ☑ Impedance-neutral disconnection of plug for test and maintenance purposes















### **Key Commercial Data**

Packing unit	10 pc
GTIN	4 046356 339865
GTIN	4046356339865

### Technical data

#### Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module height	90 mm
Complete module width	17.7 mm
Complete module depth	65.5 mm

#### Ambient conditions



## Technical data

### Ambient conditions

Ambient temperature (operation)	-40 °C 85 °C
Ambient temperature (storage/transport)	-40 °C 85 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Degree of protection	IP20

#### General

Housing material	PA 6.6
Flammability rating according to UL 94	V-0
Color	jet black RAL 9005
Mounting type	on base element
Туре	Male
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 3.17

#### Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U <sub>N</sub>	48 V AC
Maximum continuous voltage U <sub>C</sub>	77 V DC
	55 V AC
Rated current	300 mA (45 °C)
Operating effective current I <sub>C</sub> at U <sub>C</sub>	≤ 5 µA
Residual current I <sub>PE</sub>	≤ 1 μA (with PT 4X1+F-BE)
	≤ 20 μA (Directly grounded)
Nominal discharge current I <sub>n</sub> (8/20) µs (line-earth)	10 kA
Pulse discharge current I <sub>imp</sub> (10/350) μs	2.5 kA (per path)
Total discharge current I <sub>total</sub> (8/20) μs	20 kA
Max. discharge current I <sub>max</sub> (8/20) μs maximum (line-earth)	10 kA (per path)
	20 kA (in total)
Nominal pulse current lan (10/1000) µs (line-earth)	12 A
Output voltage limitation at 1 kV/µs (line-earth) spike	≤ 110 V (with PT 4X1-BE)
	≤ 600 V (with PT 4X1+F-BE)
Output voltage limitation at 1 kV/µs (line-earth) static	≤ 50 V (with PT 4X1+F-BE)
Residual voltage at In (line-earth)	≤ 160 V (spike)
	≤ 110 V (static)
Residual voltage with lan (10/1000) μs (line-signalground)	≤ 125 V
Voltage protection level U <sub>p</sub> (line-earth)	≤ 150 V (C2 - 10 kV / 5 kA with PT 4X1-BE)
Voltage protection level U <sub>p</sub> static (line-earth)	≤ 40 V (C2 - 10 kV / 5 kA with PT 4X1-BE)
Response time tA (line-signalground)	≤ 1 ns (with PT 4X1+F-BE)

09/07/2019 Page 2 / 6



## Technical data

### Protective circuit

Response time t <sub>A</sub> (line-earth)	≤ 1 ns (with PT 4X1-BE)
	≤ 100 ns (with PT 4X1+F-BE)
Input attenuation aE, asym.	0.5 dB (≤ 2.5 MHz / 50 Ω)
	0.2 dB (≤ 0.5 MHz / 150 Ω)
	0.1 dB (≤ 0.1 MHz / 600 Ω)
Cut-off frequency fg (3 dB), asym. (PE) in 50 Ohm system	typ. 10 MHz
Cut-off frequency fg (3 dB), asym. (PE) in 150 Ohm system	typ. 3.5 MHz
Cut-off frequency fg (3 dB), asym. (PE) in 600 Ohm system	typ. 900 kHz
Capacity (line-earth)	typ. 400 pF (with PT 4X1-BE)
	typ. 2 pF (with PT 4X1+F-BE)
Resistance in series	4.7 Ω ±10 %
Surge protection fault message	none
Max. required back-up fuse	315 mA (T)
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	D1 - 2.5 kA

#### Connection data

Connection method	Screw connection (in connection with the base element)
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section solid	0.2 mm² 4 mm²
Conductor cross section AWG	24 12

## Standards and Regulations


Standards/specifications	IEC 61643-21 2000
--------------------------	-------------------

### **Environmental Product Compliance**

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings



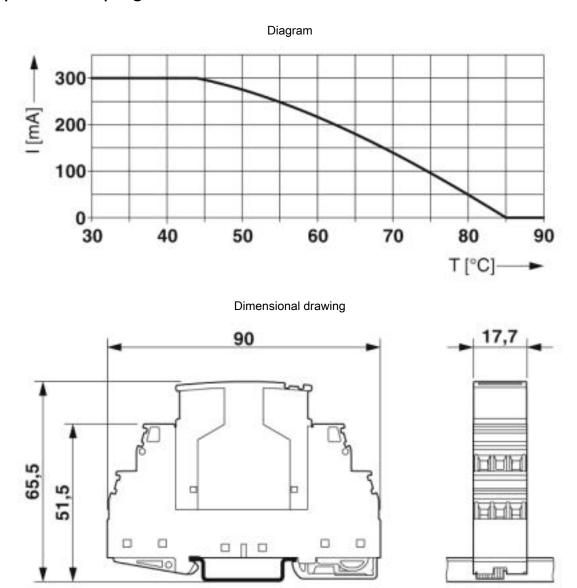


The figure shows the complete module consisting of a base element and connector



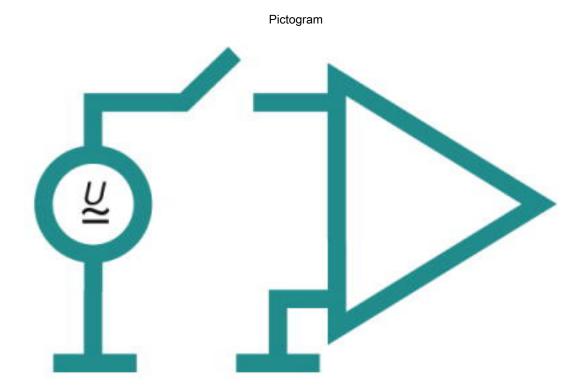

Circuit diagram

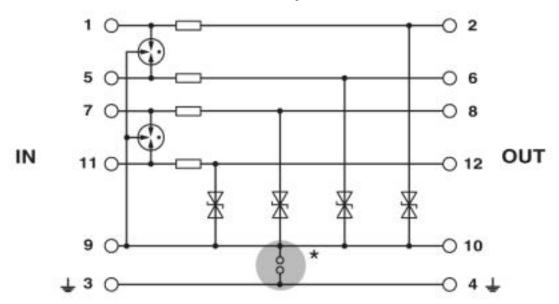

## Approvals

Approvals

Approvals

EAC



Approvals		
Ex Approvals		
Approval details		
EAC	EAC	RU C- DE.A*30.B01561

Phoenix Contact 2019 @ - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com