

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012025	Mini Fit Jr 2CKT RECP. HSG 555702R210	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

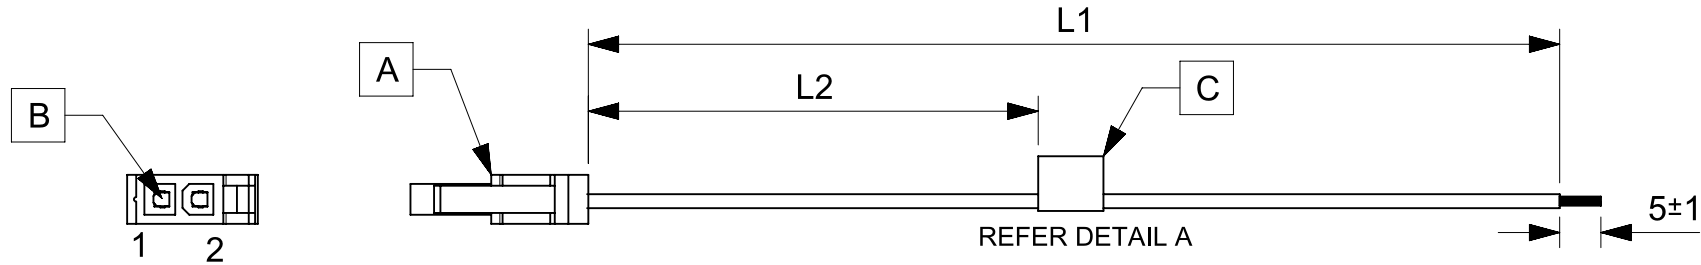


TABLE			
PART NUMBER	L1	L2	TITLE
2153261021	150±8	63 REF	MINIFIT JR DR R-S 2 CIRCUIT 150MM Sn
2153261022	300±10	138 REF	MINIFIT JR DR R-S 2 CIRCUIT 300MM Sn
2153261023	600±10	288 REF	MINIFIT JR DR R-S 2 CIRCUIT 600MM Sn

NOTES

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/19	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC:								
	mm	NTS	EC NO: 638379 DRWN: ARAJU 2020/03/19 CHK'D: RDESAI01 2020/05/28 APPR: RDESAI01 2020/05/28								
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		INITIAL REVISION:								
	ANGULAR TOL	± °	DRWN: ARAJU 2020/03/19 APPR: RDESAI01 2020/05/28								
4 PLACES ±		3 PLACES ±		2 PLACES ±		1 PLACE ±		0 PLACES ±			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
			A4-SIZE	215326	SEE TABLE	GENERAL MARKET	2153261021		PSD	000	A
							SEE TABLE				1 OF 1

RELEASE STATUS	P1	RELEASE DATE	2020/05/28	07:59:24
----------------	----	--------------	------------	----------