
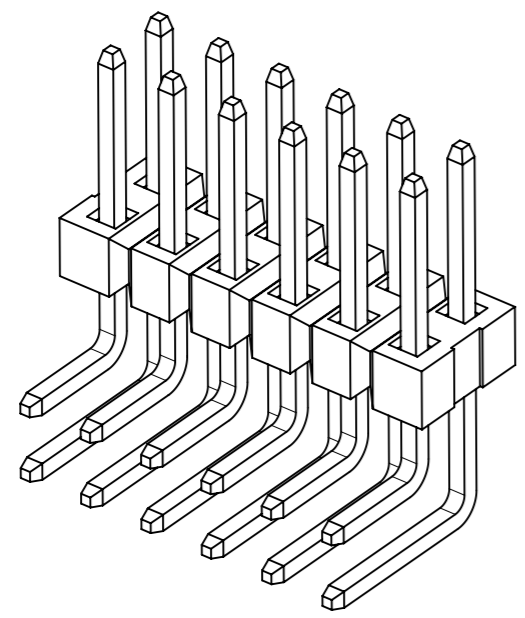
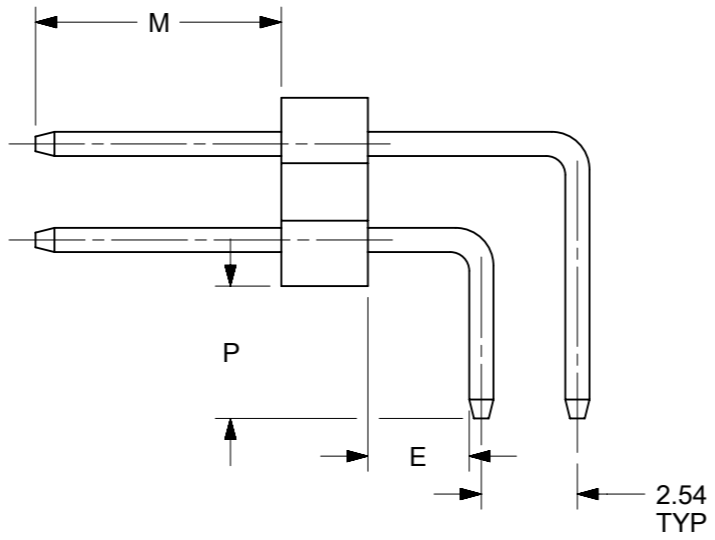


0.64 ±0.05
SQ TYP

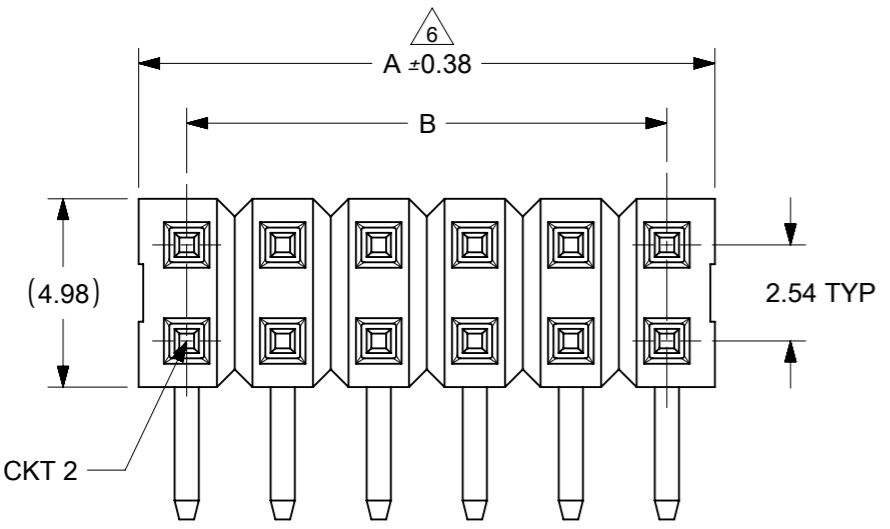

NOTE:

1. MATERIAL:
HOUSING: - LCP, GLASS FILLED, UL94V-0
COLOR: BLACK
TERMINAL: - COPPER ALLOY, 0.64MM SQ
2. PLATING TYPE:
1) 15µin MIN. GOLD PLATE ON CONTACT AND
75µin MIN. TIN ON SOLDER TAIL OVER
50µin MIN. NICKEL OVERALL.
2) 30µin MIN. GOLD PLATE ON CONTACT AND
75µin MIN. TIN ON SOLDER TAIL OVER
50µin MIN. NICKEL OVERALL.
3) 100µin MIN. TIN OVERALL.
50µin MIN. NICKEL OVERALL.
3. THE ABOVE 14 CKT SHOWN IS FOR ILLUSTRATION ONLY..
4. PIN PUSHOUT FORCE: 1KG MIN. IN EITHER DIRECTION
5. PART TO BE PACKED IN TUBE.
6. IRREGULAR CIRCUIT CUTOFF WITHIN BREAKAWAY SECTION IS PERMISSIBLE. CUTTING OR CHIPPING OF THE MAIN BODY IS NOT ACCEPTABLE
7. RECOMMENDED PCB THICKNESS = 1.60±0.10mm
8. PRODUCT SPECIFICATION: PS-87920-019
9. PACKAGING SPECIFICATION: PK-89990-519

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: MIGRATED TO NX																						
	$\nabla_A = 0$ $\nabla_F = 0$ $\nabla_P = 0$	DIMENSION UNITS: mm SCALE: 5:1	GENERAL TOLERANCES (UNLESS SPECIFIED)					CUSTOM HEADER C-GRID DUAL ROW HEADER RIGHT ANGLE THROUGH HOLE																	
DIVISIONAL SYMBOLS	<table border="1"> <thead> <tr> <th></th> <th>MM</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±</td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.2</td> <td>±</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td>±</td> </tr> </tbody> </table>			MM	INCH	4 PLACES	±	±	3 PLACES	±	±	2 PLACES	± 0.2	±	1 PLACE	±	±	0 PLACES	±	±	EC NO: 635905 DRWN: ABABUPS CHK'D: MRAMAKRISHNA APPR: MRAMAKRISHNA		PRODUCT CUSTOMER DRAWING		
		MM	INCH																						
4 PLACES	±	±																							
3 PLACES	±	±																							
2 PLACES	± 0.2	±																							
1 PLACE	±	±																							
0 PLACES	±	±																							
ANGULAR TOL ± 3.0°		INITIAL REVISION: DRWN: YLQIAO APPR: SLOW		DOCUMENT NUMBER: SD-87911-027 DOC TYPE: PSD DOC PART: 001 REVISION: B2		SHEET NUMBER: 1 OF 4																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING: A3-SIZE SERIES: 87911		MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET																			

F
E
D
C
B
A

PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	M	P	E
87911-0411	4	----	1	5.08	2.54	6.10	3.18	2.27
87911-0412	4	----	2	5.08	2.54	6.10	3.18	2.27
87911-0413	4	----	3	5.08	2.54	6.10	3.18	2.27
87911-0611	6	----	1	7.62	5.08	6.10	3.18	2.27
87911-0612	6	----	2	7.62	5.08	6.10	3.18	2.27
87911-0613	6	----	3	7.62	5.08	6.10	3.18	2.27
87911-0811	8	----	1	10.16	7.62	6.10	3.18	2.27
87911-0812	8	----	2	10.16	7.62	6.10	3.18	2.27
87911-0813	8	----	3	10.16	7.62	6.10	3.18	2.27
87911-0800	8	----	1	10.16	10.16	6.10	3.18	2.27
87911-1011	10	----	1	12.7	10.16	6.10	3.18	2.27
87911-1012	10	----	2	12.7	10.16	6.10	3.18	2.27
87911-1013	10	----	3	12.7	10.16	6.10	3.18	2.27
87911-1211	12	----	1	15.24	12.70	6.10	3.18	2.27
87911-1212	12	----	2	15.24	12.70	6.10	3.18	2.27
87911-1213	12	----	3	15.24	12.70	6.10	3.18	2.27
87911-1411	14	----	1	17.78	15.24	6.10	3.18	2.27
87911-1412	14	----	2	17.78	15.24	6.10	3.18	2.27
87911-1413	14	----	3	17.78	15.24	6.10	3.18	2.27
87911-1611	16	----	1	20.32	17.78	6.10	3.18	2.27
87911-1612	16	----	2	20.32	17.78	6.10	3.18	2.27
87911-1613	16	----	3	20.32	17.78	6.10	3.18	2.27


PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	M	P	E
87911-1811	18	—	1	22.86	20.32	6.10	3.18	2.27
87911-1812	18	—	2	22.86	20.32	6.10	3.18	2.27
87911-1813	18	—	3	22.86	20.32	6.10	3.18	2.27
87911-2011	20	—	1	25.40	22.86	6.10	3.18	2.27
87911-2012	20	—	2	25.40	22.86	6.10	3.18	2.27
87911-2013	20	—	3	25.40	22.86	6.10	3.18	2.27
87911-2211	22	—	1	27.94	25.40	6.10	3.18	2.27
87911-2212	22	—	2	27.94	25.40	6.10	3.18	2.27
87911-2213	22	—	3	27.94	25.40	6.10	3.18	2.27
87911-2411	24	—	1	30.48	27.94	6.10	3.18	2.27
87911-2412	24	—	2	30.48	27.94	6.10	3.18	2.27
87911-2413	24	—	3	30.48	27.94	6.10	3.18	2.27
87911-2611	26	—	1	33.02	30.48	6.10	3.18	2.27
87911-2612	26	—	2	33.02	30.48	6.10	3.18	2.27
87911-2613	26	—	3	33.02	30.48	6.10	3.18	2.27
87911-2811	28	—	1	35.56	33.02	6.10	3.18	2.27
87911-2812	28	—	2	35.56	33.02	6.10	3.18	2.27
87911-2813	28	—	3	35.56	33.02	6.10	3.18	2.27
87911-3011	30	—	1	38.10	35.56	6.10	3.18	2.27
87911-3012	30	—	2	38.10	35.56	6.10	3.18	2.27
87911-3013	30	—	3	38.10	35.56	6.10	3.18	2.27

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
FUNCTIONAL SYMBOLS	FA = 0	mm	SCALE 1:1	CURRENT REV DESC: MIGRATED TO NX					
	FB = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 635905 DRWN: ABABUPS 2020/04/14 CHK'D: MRAMAKRISHNA 2020/04/15 APPR: MRAMAKRISHNA 2020/04/15 INITIAL REVISION: DRWN: YLQIAO 2005/01/17 APPR: SLOW 2005/01/25				
FC = 0	MM INCH								
DIVISIONAL SYMBOLS	4 PLACES	±	±	CUSTOMER: GENERAL MARKET MATERIAL NUMBER: SEE TABLE SHEET NUMBER: 2 OF 4					
	3 PLACES	±	±						
	2 PLACES	± 0.2	±						
	1 PLACE	±	±						
0 PLACES	±	±	±	DOCUMENT NUMBER: SD-87911-027 DOC TYPE: PSD DOC PART: 001 REVISION: B2					
ANGULAR TOL ± 3.0°			THIRD ANGLE PROJECTION						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DRAWING A3-SIZE		SERIES 87911		CUSTOMER GENERAL MARKET		

F
E
D
C
B
A



PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	C	D	E
87911-3211	32	—	1	40.64	38.10	6.10	3.18	2.27
87911-3212	32	—	2	40.64	38.10	6.10	3.18	2.27
87911-3213	32	—	3	40.64	38.10	6.10	3.18	2.27
87911-3411	34	—	1	43.18	40.64	6.10	3.18	2.27
87911-3412	34	—	2	43.18	40.64	6.10	3.18	2.27
87911-3413	34	—	3	43.18	40.64	6.10	3.18	2.27
87911-3611	36	—	1	45.72	43.18	6.10	3.18	2.27
87911-3612	36	—	2	45.72	43.18	6.10	3.18	2.27
87911-3613	36	—	3	45.72	43.18	6.10	3.18	2.27
87911-3811	38	—	1	48.26	45.72	6.10	3.18	2.27
87911-3812	38	—	2	48.26	45.72	6.10	3.18	2.27
87911-3813	38	—	3	48.26	45.72	6.10	3.18	2.27
87911-4011	40	—	1	50.80	48.26	6.10	3.18	2.27
87911-4012	40	—	2	50.80	48.26	6.10	3.18	2.27
87911-4013	40	—	3	50.80	48.26	6.10	3.18	2.27
87911-4211	42	—	1	53.34	50.80	6.10	3.18	2.27
87911-4212	42	—	2	53.34	50.80	6.10	3.18	2.27
87911-4213	42	—	3	53.34	50.80	6.10	3.18	2.27
87911-4411	44	—	1	55.88	53.34	6.10	3.18	2.27
87911-4412	44	—	2	55.88	53.34	6.10	3.18	2.27
87911-4413	44	—	3	55.88	53.34	6.10	3.18	2.27

PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	M	P	E
87911-4611	46	—	1	58.42	55.88	6.10	3.18	2.27
87911-4612	46	—	2	58.42	55.88	6.10	3.18	2.27
87911-4613	46	—	3	58.42	55.88	6.10	3.18	2.27
87911-4811	48	—	1	60.96	58.42	6.10	3.18	2.27
87911-4812	48	—	2	60.96	58.42	6.10	3.18	2.27
87911-4813	48	—	3	60.96	58.42	6.10	3.18	2.27
87911-5011	50	—	1	63.50	60.96	6.10	3.18	2.27
87911-5012	50	—	2	63.50	60.96	6.10	3.18	2.27
87911-5013	50	—	3	63.50	60.96	6.10	3.18	2.27
87911-5211	52	—	1	66.04	63.50	6.10	3.18	2.27
87911-5212	52	—	2	66.04	63.50	6.10	3.18	2.27
87911-5213	52	—	3	66.04	63.50	6.10	3.18	2.27
87911-5411	54	—	1	68.58	66.04	6.10	3.18	2.27
87911-5412	54	—	2	68.58	66.04	6.10	3.18	2.27
87911-5413	54	—	3	68.58	66.04	6.10	3.18	2.27
87911-5611	56	—	1	71.12	68.58	6.10	3.18	2.27
87911-5612	56	—	2	71.12	68.58	6.10	3.18	2.27
87911-5613	56	—	3	71.12	68.58	6.10	3.18	2.27
87911-5811	58	—	1	73.66	71.12	6.10	3.18	2.27
87911-5812	58	—	2	73.66	71.12	6.10	3.18	2.27
87911-5813	58	—	3	73.66	71.12	6.10	3.18	2.27

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC: MIGRATED TO NX		 <p>CUSTOM HEADER C-GRID DUAL ROW HEADER RIGHT ANGLE THROUGH HOLE</p>													
	<table border="1"> <tr> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>mm</td> <td>1:1</td> </tr> </table>	DIMENSION UNITS	SCALE				mm	1:1	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 635905	2020/04/14					
DIMENSION UNITS	SCALE																
mm	1:1																
<table border="1"> <tr> <th>MM</th> <th>INCH</th> </tr> <tr> <td>4 PLACES ±</td> <td>±</td> </tr> <tr> <td>3 PLACES ±</td> <td>±</td> </tr> <tr> <td>2 PLACES ± 0.2</td> <td>±</td> </tr> <tr> <td>1 PLACE ±</td> <td>±</td> </tr> <tr> <td>0 PLACES ±</td> <td>±</td> </tr> </table>	MM	INCH	4 PLACES ±	±	3 PLACES ±	±	2 PLACES ± 0.2	±	1 PLACE ±	±	0 PLACES ±	±	ANGULAR TOL ± 3.0°		DRWN: ABABUPS	2020/04/15	
MM	INCH																
4 PLACES ±	±																
3 PLACES ±	±																
2 PLACES ± 0.2	±																
1 PLACE ±	±																
0 PLACES ±	±																
DIVISIONAL SYMBOLS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D: MRAMAKRISHNA	2020/04/15													
	THIRD ANGLE PROJECTION		APPR: MRAMAKRISHNA	2020/04/15													
	DRAWING		INITIAL REVISION:	DOCUMENT NUMBER													
	SERIES		DRWN: YLQIAO	SD-87911-027													
	MATERIAL NUMBER		APPR: SLOW	DOC TYPE DOC PART REVISION													
	CUSTOMER			PSD 001 B2													
	SHEET NUMBER			SEE TABLE GENERAL MARKET 3 OF 4													

PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	M	P	E
87911-6011	60	—	1	76.20	73.66	6.10	3.18	2.27
87911-6012	60	—	2	76.20	73.66	6.10	3.18	2.27
87911-6013	60	—	3	76.20	73.66	6.10	3.18	2.27
87911-6211	62	—	1	78.74	76.20	6.10	3.18	2.27
87911-6212	62	—	2	78.74	76.20	6.10	3.18	2.27
87911-6213	62	—	3	78.74	76.20	6.10	3.18	2.27
87911-6411	64	—	1	81.28	78.74	6.10	3.18	2.27
87911-6412	64	—	2	81.28	78.74	6.10	3.18	2.27
87911-6413	64	—	3	81.28	78.74	6.10	3.18	2.27
87911-6611	66	—	1	83.82	81.28	6.10	3.18	2.27
87911-6612	66	—	2	83.82	81.28	6.10	3.18	2.27
87911-6613	66	—	3	83.82	81.28	6.10	3.18	2.27
87911-6811	68	—	1	86.36	83.82	6.10	3.18	2.27
87911-6812	68	—	2	86.36	83.82	6.10	3.18	2.27
87911-6813	68	—	3	86.36	83.82	6.10	3.18	2.27
87911-7011	70	—	1	88.90	86.36	6.10	3.18	2.27
87911-7012	70	—	2	88.90	86.36	6.10	3.18	2.27
87911-7013	70	—	3	88.90	86.36	6.10	3.18	2.27
87911-7211	72	—	1	91.44	88.90	6.10	3.18	2.27
87911-7212	72	—	2	91.44	88.90	6.10	3.18	2.27
87911-7213	72	—	3	91.44	88.90	6.10	3.18	2.27

PART NO	CKT SIZE	VOID POSITION	PLATING TYPE	DIMENSION				
				A	B	M	P	E
87911-7411	74	—	1	93.98	91.44	6.10	3.18	2.27
87911-7412	74	—	2	93.98	91.44	6.10	3.18	2.27
87911-7413	74	—	3	93.98	91.44	6.10	3.18	2.27
87911-7611	76	—	1	96.52	93.98	6.10	3.18	2.27
87911-7612	76	—	2	96.52	93.98	6.10	3.18	2.27
87911-7613	76	—	3	96.52	93.98	6.10	3.18	2.27
87911-7811	78	—	1	99.06	96.52	6.10	3.18	2.27
87911-7812	78	—	2	99.06	96.52	6.10	3.18	2.27
87911-7813	78	—	3	99.06	96.52	6.10	3.18	2.27
87911-8011	80	—	1	101.60	99.06	6.10	3.18	2.27
87911-8012	80	—	2	101.60	99.06	6.10	3.18	2.27
87911-8013	80	—	3	101.60	99.06	6.10	3.18	2.27

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: MIGRATED TO NX		 <p>CUSTOM HEADER C-GRID DUAL ROW HEADER RIGHT ANGLE THROUGH HOLE</p>																				
	$\nabla_A = 0$ $\nabla_F = 0$ $\nabla_P = 0$	DIMENSION UNITS: mm SCALE: 1:1	GENERAL TOLERANCES (UNLESS SPECIFIED)					EC NO: 635905 DRWN: ABABUPS APPR: MRAMAKRISHNA 2020/04/15																	
DIVISIONAL SYMBOLS	<table border="1"> <tr><th colspan="2">MM</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>±</td><td>±</td></tr> <tr><td>3 PLACES</td><td>±</td><td>±</td></tr> <tr><td>2 PLACES</td><td>± 0.2</td><td>±</td></tr> <tr><td>1 PLACE</td><td>±</td><td>±</td></tr> <tr><td>0 PLACES</td><td>±</td><td>±</td></tr> </table>		MM		INCH	4 PLACES	±	±	3 PLACES	±	±	2 PLACES	± 0.2	±	1 PLACE	±	±	0 PLACES	±	±	INITIAL REVISION: DRWN: YLQIAO APPR: SLOW 2005/01/17 2005/01/25		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: SD-87911-027 DOC TYPE: PSD DOC PART: 001 REVISION: B2		
MM		INCH																							
4 PLACES	±	±																							
3 PLACES	±	±																							
2 PLACES	± 0.2	±																							
1 PLACE	±	±																							
0 PLACES	±	±																							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																		
			A3-SIZE	87911	SEE TABLE	GENERAL MARKET	4 OF 4																		