

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	522130411	2.5 WATER PROOF CONN REC HOUSING ASSY	2	PC
C	501488000	2.5 W.P. CONN CRIMP PIN	8	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A2	B3	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A3	B2	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A4	B1	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK

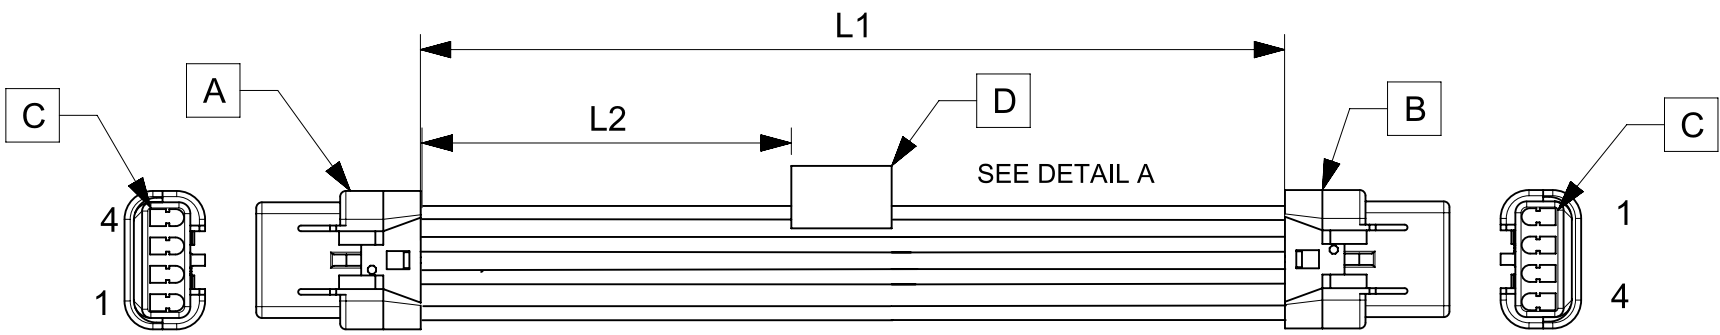


TABLE			
PART NUMBER	L1	L2	TITLE
2153101041	150±8	63 REF	MizuP25 R-R 4ckt 150mm Sn
2153101042	300±10	138 REF	MizuP25 R-R 4ckt 300mm Sn
2153101043	600±10	288 REF	MizuP25 R-R 4ckt 600mm Sn

NOTES

1. Connector view shown is from mating side.
2. Harness must pass 100% electrical continuity and polarity.
3. Connectors must pass the sealing specifications as defined by manufacturer.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>
	DIMENSION UNITS	SCALE	EC NO: 641784		
mm	NTS	DRWN: NNANKOLA 2020/07/13			
GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SD 2020/07/20			
ANGULAR TOL ± °		APPR: SD 2020/07/20		DOCUMENT NUMBER	
4 PLACES ±		INITIAL REVISION:		2153101041	
3 PLACES ±		DRWN: NNANKOLA 2020/07/13		PSD	
2 PLACES ±		APPR: SD 2020/07/20		000	
1 PLACE ±		MATERIAL NUMBER		A	
0 PLACES ±		DRWN: NNANKOLA 2020/07/13		REFER THE TABLE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	CUSTOMER
			A4-SIZE	215310	GENERAL MARKET
					SHEET NUMBER
					1 OF 1