

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0717640114](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Low Profile, Dual Row, Right-Angle, High Temperature, 14 Circuits, 0.38µm Gold (Au) Selective Plating

Documents:

[3D Model](#) [Application Specification 713080001-AS-000 \(PDF\)](#)
[3D Model \(PDF\)](#) [Packaging Specification PK-70873-0075-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [71764](#)
 Application Board-to-Board, Signal, Wire-to-Board
 Overview [C-Grid Connector Products](#)
 Product Name C-Grid
 UPC 822348430949

Physical


Breakaway Yes
 Circuits (Loaded) 14
 Circuits (maximum) 14
 Color - Resin Black
 Durability (mating cycles max) 50
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part None
 Material - Metal Brass, Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 1.194/g
 Number of Rows 2
 Orientation Right Angle
 PC Tail Length 2.79mm
 PCB Locator No
 PCB Retention None
 Packaging Type Tube
 Pitch - Mating Interface 2.54mm
 Plating min - Mating 0.381µm
 Plating min - Termination 1.905µm
 Polarized to Mating Part No
 Shrouded No
 Stackable Yes
 Temperature Range - Operating -40° to +105°C
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 3.0A
 Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 030

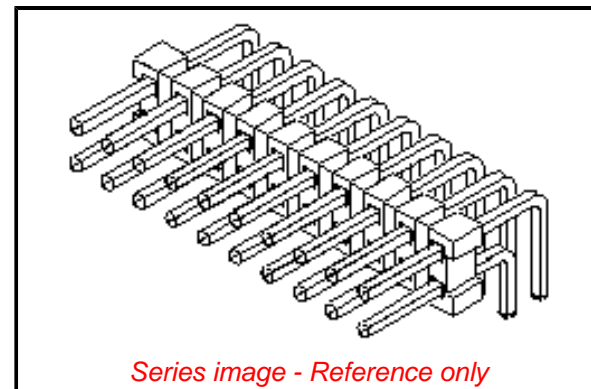

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2021)4569-DC (8
 July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71764 Series](#)

Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	265

Material Info

Reference - Drawing Numbers

Application Specification	713080001-AS-000
Packaging Specification	PK-70873-0075-001
Sales Drawing	SD-71764-001-001

This document was generated on 09/13/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION