THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	U	REVISED PER ECR-21-003767	31MAR2021	LP	MZ

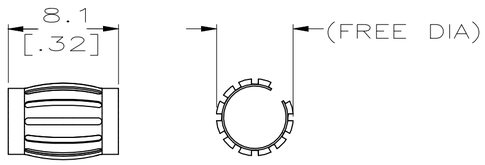

STYLE B
(MALE)

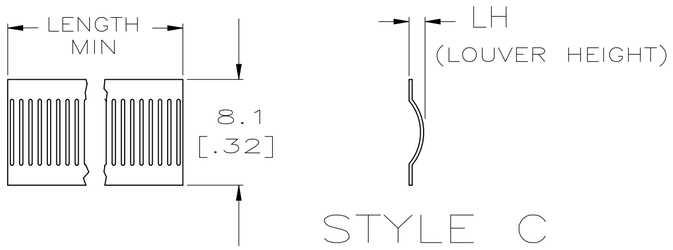

STYLE C
(STRIP)

1 FINISH-SILVER PLATE 200 uIN MIN THICK.
2 FINISH-NICKEL PLATE 40 uIN MIN THICK.
3 FINISH-GOLD PLATE 10 uIN MIN THICK.
4 FINISH-GOLD PLATE 50 uIN MIN THICK.
5 FINISH-CADMIUM PLATE 300 uIN MIN THICK.
6 FINISH-NICKEL PLATE 100 uIN MIN THICK.
7 FINISH-TIN PLATE 300 uIN MIN THICK.
8
9
10
11 PLATING NOTES ARE TO BE INTERPRETED AS FOLLOWS, 6-8 AS 6 OVER 8.
12 PRODUCT IS SOLD BY THE FOOT.
13 12 FOOT STRIP WOUND TO A ONE INCH INSIDE DIAMETER.
14 MATERIAL-BeCu (CDA172).
15 MATERIAL-STAINLESS STEEL.
16 CUT LENGTH 508.0 [20.00] APPROXIMATELY 714 LOUVERS.
17 BAND WIDTH .310±.005 FOR P/N 6-192042-6.
18 FINISH - GOLD PLATE 30uIN MIN THICK.
19 OVERLAPPED WITH GAP.
20 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
21 PRILIMINARY PART

LH	LENGTH	STYLE	(FREE DIA)	MAT'L NOTE	MATING HOLE ø REF	NUM LOUV	PLATING	MAT'L THK	REF	PART NO.
	OBSOLETE								04133	4-192042-7
20 OBSOLETE	[.022]	--	B	[.40]	14	9.5[.375]	36	3-2	0.20[.008]	04054	4-192042-6
	OBSOLETE	--	B	[.40]	14	9.5[.375]	36	1-2	0.15[.006]	04100	4-192042-5
OBSOLETE	[.022]	--	B	[.40]	14	9.5[.375]	36	5	0.15[.006]	04156	4-192042-4
20 OBSOLETE	[.022]	--		[.40]	14	9.5[.375]	36	UNPL	0.15[.006]	04101	4-192042-3
	OBSOLETE								04132	4-192042-2
	OBSOLETE								04131	4-192042-1
OBSOLETE	[.024]	--	B	[.30]	14	7.1[.280]	26	3-2	0.15[.006]	04048	4-192042-0
20 OBSOLETE	[.024]	--		[.30]	14	7.1[.280]	26	UNPL	0.15[.006]	04173	3-192042-9
	OBSOLETE								04043	3-192042-8
20 OBSOLETE	[.026]	--	B	[.23]	14	5.5[.216]	19	6	0.20[.008]	04135	3-192042-7
	[.026]	--	B	[.23]	14	5.5[.216]	19	3-2	0.20[.008]	04039	3-192042-6
OBSOLETE	[.026]	--		[.23]	14	5.5[.216]	19	1-2	0.20[.008]	04134	3-192042-5
20	OBSOLETE								04034	3-192042-4
	[.032]	--	B	[.20]	14	4.7[.185]	15	3-2	0.15[.006]	04033	3-192042-3
	OBSOLETE	--	B	[.20]	14	4.7[.185]	15	1-2	0.15[.006]	04032	3-192042-2
OBSOLETE	[.032]	--		[.20]	14	4.7[.185]	15	UNPL	0.15[.006]	04063	3-192042-1
20									04130	3-192042-0
	[.022]	--	B	[.17]	14	4.0[.157]	13	4-2	0.15[.006]	04155	2-192042-9
	[.022]	--	B	[.17]	14	4.0[.157]	13	3-2	0.15[.006]	04068	2-192042-8
OBSOLETE	[.022]	--	B	[.17]	14	4.0[.157]	13	6	0.15[.006]	04088	2-192042-7
20	[.022]	--	B	[.17]	14	4.0[.157]	13	1-2	0.15[.006]	04087	2-192042-6
	[.022]	--	B	[.17]	14	4.0[.157]	13	UNPL	0.15[.006]	04089	2-192042-5
	[.022]	--	B	[.15]	14	3.5[.138]	12	3-2	0.15[.006]	04026	2-192042-4
	[.022]	--	B	[.14]	14	3.0[.118]	10	3-2	0.15[.006]	04022	2-192042-3
	[.022]	--	B	[.14]	14	3.0[.118]	10	UNPL	0.15[.006]	04021	2-192042-2
OBSOLETE	[.022]	--	B	[.13]	14	2.8[.110]	10	3-2	0.12[.005]	04018	2-192042-1
	[.022]	--	B	[.13]	14	2.5[.098]	9	3-2	0.15[.006]	04016	2-192042-0
20	[.026]	--	B	[.13]	14	2.3[.091]	9	3-2	0.20[.008]	04014	1-192042-9
	[.022]	--	B	[.11]	14	2.0[.080]	6	6	0.15[.006]	04012	1-192042-8
	[.022]	--		[.11]	14	2.0[.080]	6	3-2	0.15[.006]	04011	192042 -7
									04152	1-192042-6
OBSOLETE	[.026]	--	B	[.11]	14	2.0[.080]	6	3-2	0.12[.005]	04171	1-192042-5
	[.026]	--	B	[.11]	14	2.0[.080]	6	6	0.12[.005]	04219	1-192042-4
	[.026]	--	B	[.11]	14	2.0[.080]	6	UNPL	0.12[.005]	04153	1-192042-3
	[.020]	--	B	[.10]	14	2.0[.080]	6	6	0.10[.004]	04150	1-192042-2
	[.020]	--	B	[.10]	14	2.0[.080]	6	UNPL	0.10[.004]	04151	1-192042-1
	[.026]	NOTE 13	C	--	14	--	--	3-2	0.12[.005]	04175	1-192042-0
	[.028]	NOTE 12	C	--	14	--	--	3-2	0.20[.008]	04127	192042-9
OBSOLETE	[.028]	NOTE 12	C	--	14	--	--	1-2	0.20[.008]	04160	192042-8
20	[.028]	NOTE 12	C	--	14	--	--	UNPL	0.20[.008]	04161	192042-7
	[.026]	NOTE 12	C	--	14	--	--	3-2	0.15[.006]	04003	192042-6
	[.026]	NOTE 12	C	--	14	--	--	1-2	0.15[.006]	04217	192042-5
	[.026]	NOTE 12	C	--	14	--	--	UNPL	0.15[.006]	04085	192042-4
OBSOLETE	[.026]	NOTE 12	C	--	14	--	--	1-2	0.12[.005]	04141	192042-3
20	[.026]	NOTE 12	C	--	14	--	--	UNPL	0.12[.005]	--	192042-2
	[.016]	NOTE 12	C	--	15	--	--	UNPL	0.12[.005]	04181	192042-1

192042

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.5[.02]
3 PLC ± 0.25[.010]
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN RA JAYNE 06-12-92
CHK J.TURNER 07-21-93
APVD S.SIEGRIST 07-21-93
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME CONTACT BAND, MALE

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-192042 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 2 | REV U

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

	LH	LENGTH	STYLE	(FREE DIA)	MAT'L	MATING HOLE ø REF	NUM LOUV	PLATING	MAT'L THK	REF	PART NO.
	--		--	--	--	--	--	--	--	--	--