


T354H226K025AS

T354, Tantalum, MnO₂ Tantalum, Commercial Grade, 22 uF, 10%, 25 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 6.35mm

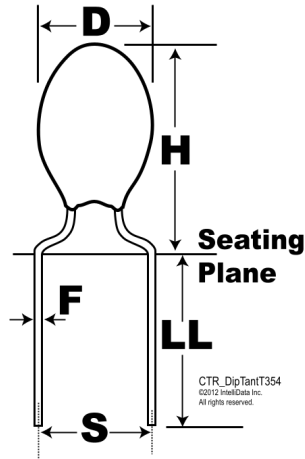

Click [here](#) for the 3D model.

Dimensions

D	7.6mm
H	11.9mm
S	6.35mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	500

General Information

Series	T354
Dielectric	MnO ₂ Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	0c1392c3-c7b9-4178-827c-fa26617a3178
Termination	Lead (SnPb)
AEC-Q200	No
Notes	Longest Lead Is Positive.

Specifications

Capacitance	22 uF
Capacitance Tolerance	10%
Voltage DC	25 VDC (85C), 16 VDC (125C), 0.25 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	4.4 uA