

## Pin strip - PST 1,3/ 3-5,0 L15,5 - 1804770

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The figure shows a 6-position version

Pin strip, nominal current: 12 A, number of positions: 3, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, The maximum current depends on the plug used. The lower of the two current values apply for plug and pin strip. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.

### Your advantages

- Suitable for wave and reflow soldering processes
- Optimum pin geometry for all COMBICON pin strip connectors



### Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356668842

### Technical data

#### Dimensions

Length [ l ]	2.8 mm
Width	14.6 mm
Pitch	5 mm
Dimension a	10 mm
Width [ w ]	14.6 mm
Height [ h ]	15.5 mm
Height	12 mm
Length of the solder pin	3.5 mm
Pin dimensions	ø 1.3 mm
Length	2.8 mm

#### General

Range of articles	PST 1,3/..-V
-------------------	--------------

# Pin strip - PST 1,3/ 3-5,0 L15,5 - 1804770

## Technical data

### General

Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Color	black
Number of positions	3

### Standards and Regulations


Connection in acc. with standard	EN-VDE
----------------------------------	--------

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Diagram

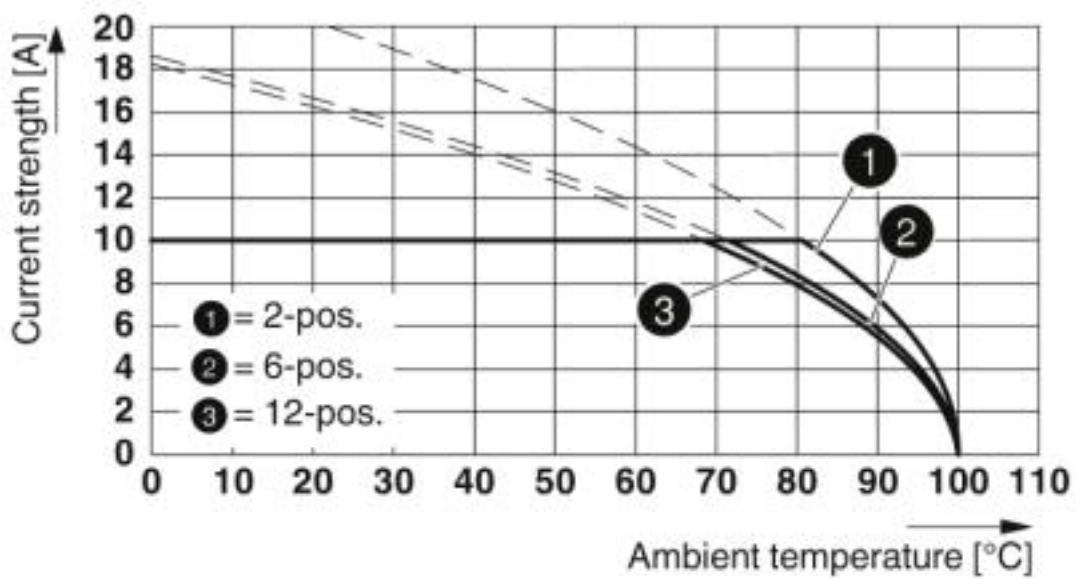

Type: PTS 1,5/...-PH-5,0 CLIP with PST 1,3/...-5,0

## Approvals

Approvals

Approvals

EAC

## Pin strip - PST 1,3/ 3-5,0 L15,5 - 1804770

### Approvals

Ex Approvals

---

#### Approval details

EAC		B.01742
-----	---	---------



---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>