
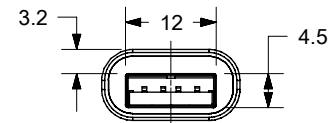


HDMI AOC P/N	OVERALL LENGTH, L (m)
1064134001	1
1064134003	3
1064134005	5
1064134010	10
1064134020	20
1064134030	30
1064134040	40
1064134045	45
1064134050	50
1064134100	100

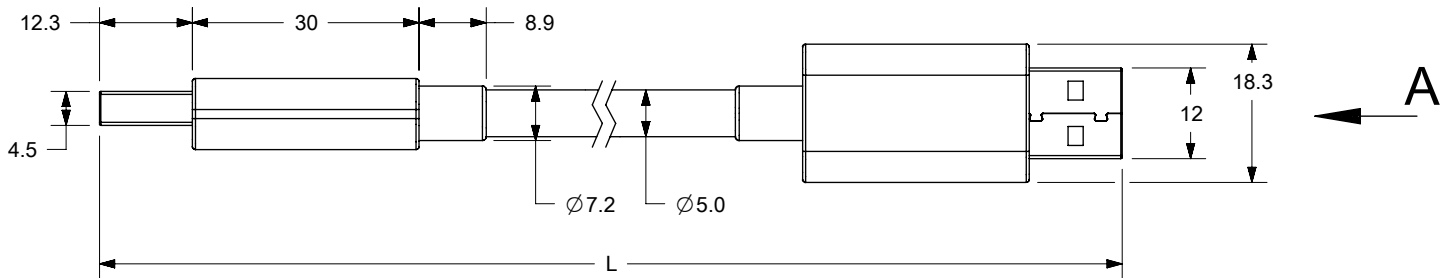

VIEW A
ROTATED 90° CW

NOTES:

- SUPPORTS USB3.1 GEN2 (BANDWIDTH 10Gbps).
BACKWARDS COMPATIBLE WITH USB2.0
POWER DELIVERY: 5V / 2A (<5M), 5V1A (5M - 10M)
- MATERIAL:
BACKSHELL - AL ALLOY, ANODIC OXIDATION, COLOR - NATURAL
CABLE - BLACK, FIRE RETARDANT PVC, INCLUDE 5X COPPER WIRES
AND 2X MULTIMODE FIBERS (50/125 μm, OM2),
KEVLAR FILLS AND THE TENSION CAN REACH 100 N
- STANDARD USB TYPE-A MALE CONNECTOR.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC:		molex		
mm	1:1					
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 674743		USB 3.1 TYPE A, ACTIVE OPTICAL CBL, M-M		
ANGULAR TOL ± °		DRWN: IGUMIN 2021/08/20		PRODUCT CUSTOMER DRAWING		
4 PLACES	±	CHK'D: LRANKIN 2021/08/21		DOCUMENT NUMBER		
3 PLACES	±	APPR: LRANKIN 2021/08/21		1064134001		
2 PLACES	±	INITIAL REVISION:		DOC TYPE	DOC PART	REVISION
1 PLACE	±	DRWN: IGUMIN 2018/04/06		PSD	000	A2
0 PLACES	±	APPR: IGUMIN 2018/04/24		SHEET NUMBER		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER
			A-SIZE	106413	SEE TABLE	

DOCUMENT STATUS	P1	RELEASE DATE	2021/08/21	00:55:48
-----------------	----	--------------	------------	----------