


## T340A335K015AS7301

Aliases (T340A335K015ASTR)

T340, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 3.3 uF, 10%, 15 VDC, 6 Ohms, Lead Spacing = 2.5mm

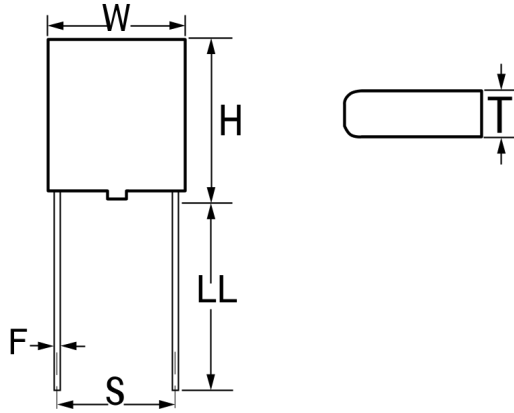

Click [here](#) for the 3D model.

Dimensions	
W	4.7mm MAX
H	7.3mm MAX
T	4.2mm MAX
S	2.5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	1000

General Information	
Series	T340
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	No
Prop 65	<b>⚠ WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">http://www.p65warnings.ca.gov</a> .
SCIP Number	a3b4e2e1-63ea-439e-a89a-743225502a7d
Termination	Lead (SnPb)
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	3.3 uF
Capacitance Tolerance	10%
Voltage DC	15 VDC (85C), 10 VDC (125C), 0.15 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Resistance	6 Ohms (100kHz)
Leakage Current	1 uA