


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0464373105](#)
Status: **Active**
Overview: EXTreme Ten60Power High-Current Connector
Description: 2.00mm, 5.50mm Pitch EXTreme Ten60Power Right-Angle Plug Assembly with Guide Pins, 6 DC Power Circuits, 25 Signal Circuits

Documents:

3D Model	Packaging Specification PK-46437-001-000 (PDF)
3D Model (PDF)	Test Summary 464361000-TS-000 (PDF)
Drawing (PDF)	Datasheet (PDF)
Product Specification PS-46436-100-001 (PDF)	RoHS Certificate of Compliance (PDF)

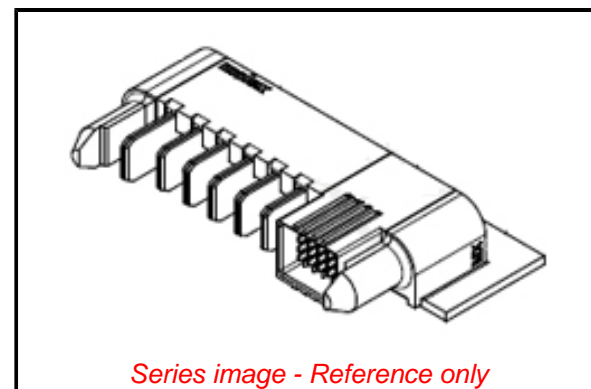

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	46437
Application	Board-to-Board, Power, Signal
Comments	See PS-46436-100 for details
Overview	EXTreme Ten60Power High-Current Connector
Product Name	EXTreme Ten60Power
UPC	884982578029

Physical

(p)ower-(s)ignal Configuration	6p - 25s
Breakaway	No
Circuits (Loaded)	31
Circuits (maximum)	31
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	18.00mm
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	23.458/g
Number of Rows	1, 5
Orientation	Right Angle
PC Tail Length	2.84mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm, 5.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46437](#) Series

Mates With

[464363105](#) , [465623105](#) EXTreme
Ten60Power Receptacle

Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.5A, 60.0A
Voltage - Maximum	600V AC / 250V DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-46437-001-000
Product Specification	PS-46436-100-001
Test Summary	464361000-TS-000

This document was generated on 10/04/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION