

Low-Profile, Shielded Drum Core, Tapped Inductor

SDT30 Series



Description

- Halogen Free
- Approved for use with Maxim® MAX14521 chip set
- 125°C maximum total temperature operation
- 3.1 x 3.1 x 1.0mm shielded drum core
- Ferrite core material
- Low losses
- High efficiency
- Reduces peak output currents
- Magnetically shielded, low EMI
- RoHS compliant

Applications

- Keypads
- Instrument clusters
- EL backlighting
- Buck or boost inductor

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (with derated current)
- Solder reflow temperature: J-STD-020D compliant

Packaging

- Supplied in tape-and-reel packaging, 5000 parts per reel, 13" diameter reel
- Also supplied in tape-and-reel packaging, 7" diameter reel. See product specifications table note 5 below.



Product Specifications

Part Number ⁵	Pin Numbers	OCL ¹ (μH)	Part Marking Designator	Turns Ratio Primary:Secondary	I _{rms} ² (Amps)	I _{sat} ³ (Amps) @25°C	DCR (mΩ) @20°C	K-factor ⁴
					0.60	0.85	0.41 ± 15%	
SDT30-127-R	(1 - 2) Primary	2.9 ± 30%	A	1:7	0.13	0.12	9.0 ± 15%	856.0
	(2 - 3) Secondary	148 ± 20%			N/A			

1 Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.10V_{rms}, 0.0Adc

2 I_{rms}: DC current for an approximate temperature rise of 40°C without core loss when either the primary or secondary winding is running separately. Derating is necessary for AC currents. PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 125°C under worst case operating conditions verified in the end application.


3 I_{sat}: Peak current for approximately 30% rolloff at +25°C of primary or secondary with another winding open.

4 K-factor: Used to determine B_{p-p} for core loss (see graph). B_{p-p} = K · L · ΔI. B_{p-p}: (Gauss), K: (K-factor from table), L: (primary inductance in μH), ΔI (peak-to-peak ripple current in amps).

5 Part Number Definition: SDT30-x2x-yy-R


- SDT30 = Product code and size
- -x2x = Turns ratio (first "x" = primary winding, "2" = "." and second "x" = secondary winding) e.g., -127 = 1:7 primary to secondary turns ratio.
- -yy = add "T7" for 7 inch tape-and-reel package. Leave blank for 5000 parts on 13 inch tape-and-reel package.
- "-R" suffix = RoHS compliant

Dimensions - mm

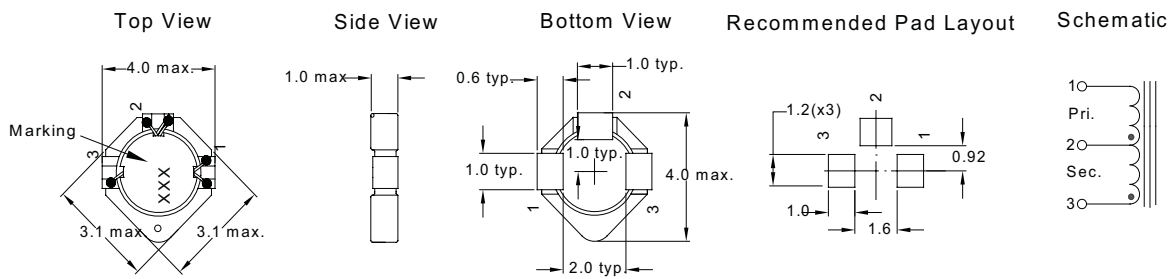


Part Marking: Three digit marking; 1st digit indicated inductance value per Part Marking Designator chart, 2nd digit indicated bi-weekly production date code, 3rd digit is last digit of the year produced.

Packaging Information - mm

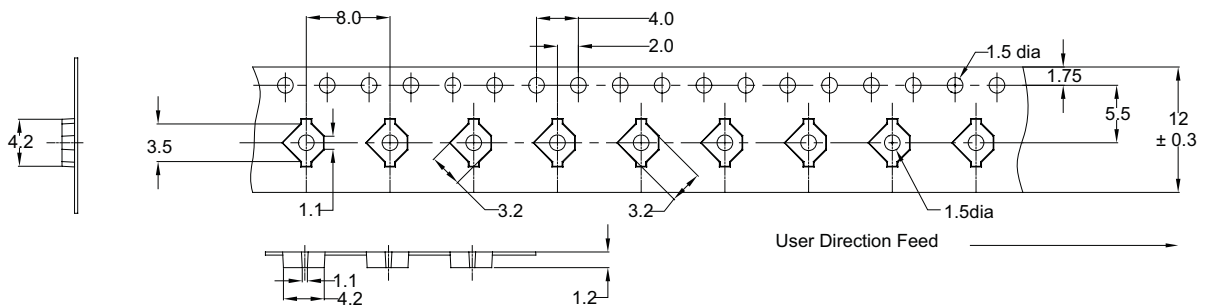


Supplied in tape-and-reel packaging, 5000 parts per reel, 13" diameter reel. Also supplied in tape-and-reel packaging on 7" diameter reel (not shown above). See product specifications table note 5 on page 1 for ordering details.

Temperature Rise vs. Total Loss

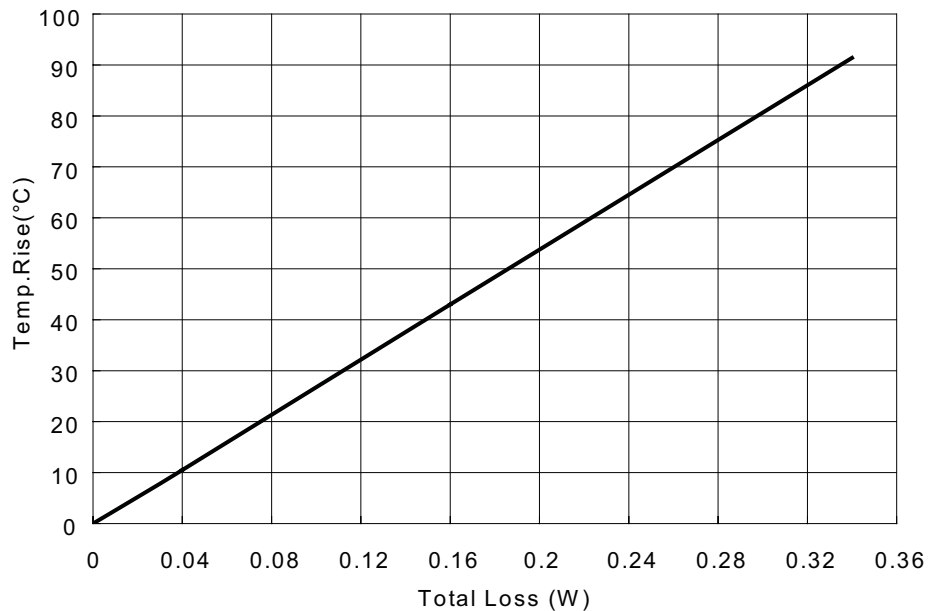


Core Loss

Core Loss vs. B_{p-p}

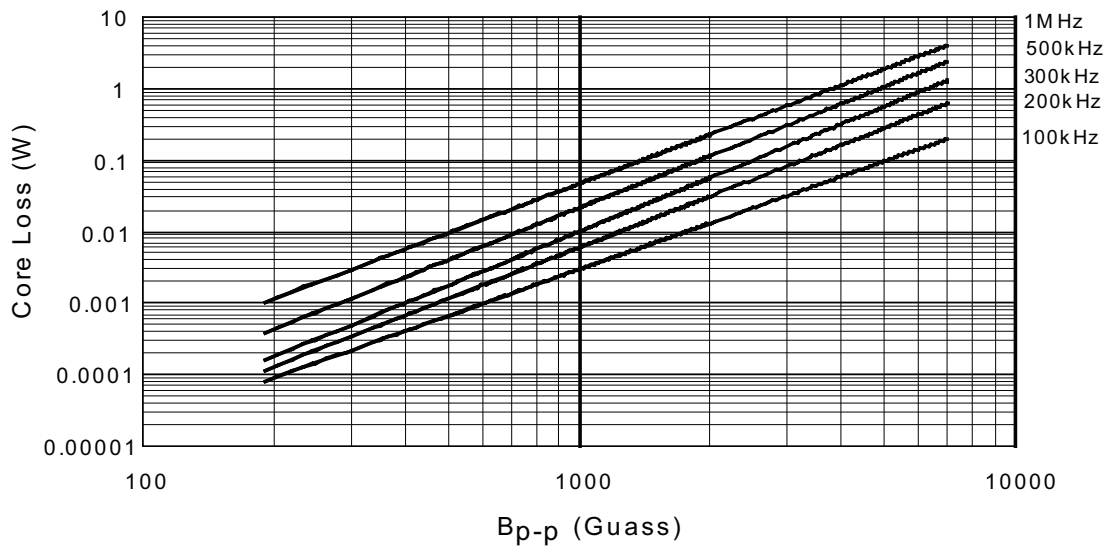


Inductance Characteristics

% of OCL vs. DC Bias current
PRIMARY - secondary winding OPEN

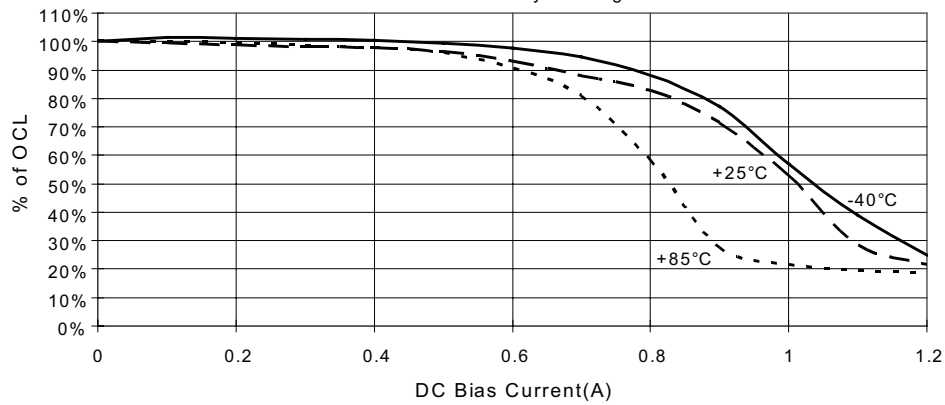

% of OCL vs. DC Bias current
SECONDARY - primary winding OPEN

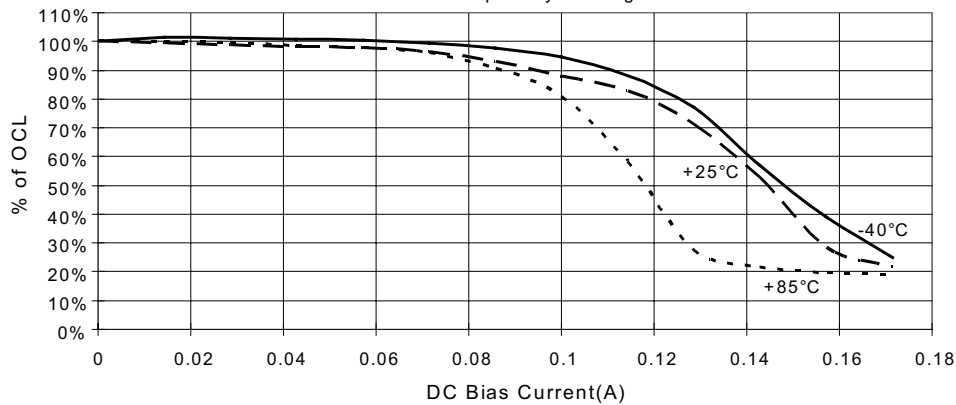

Solder Reflow Profile

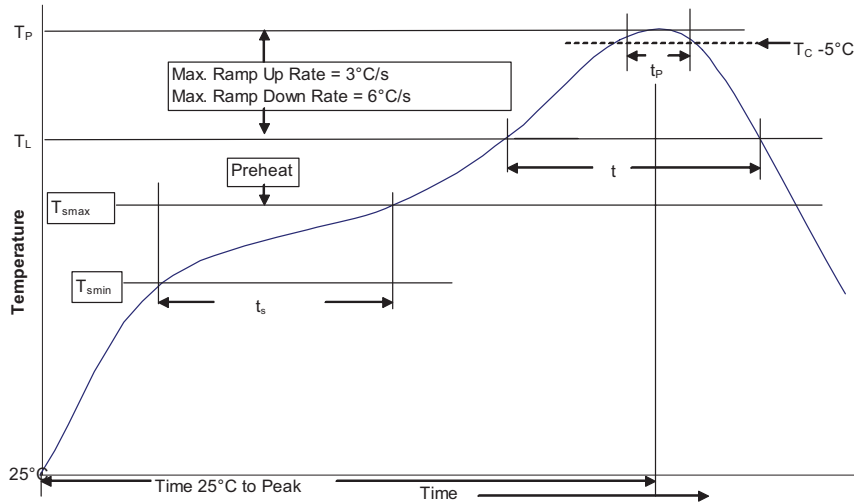


Table 1 - Standard SnPb Solder (T_c)

Package Thickness	Volume ≤ 350 mm ³	Volume ≥ 350 mm ³
<2.5mm	235°C	220°C
≥ 2.5 mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package Thickness	Volume ≤ 350 mm ³	Volume 350 - 2000 mm ³	Volume >2000 mm ³
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5 mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Cooper Electronic Technologies
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.