

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

旧用



ISSUE NUMBER

ORIGINAL

(1)

11.94 2.54

10.70

5.80

.X ±0.25


.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: C


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL TIN PLATED OLD FLASH PLATED

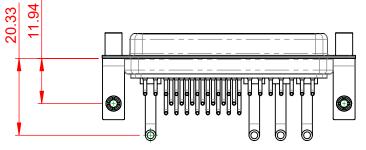

CONTACT:	COPPER ALLOY, G
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

1000V AC rms

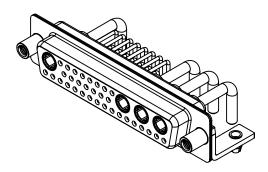

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAGE INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 630-36W	4250-2TD	ISSUE
			PART NUMBER: 630-36W	4250-2TD	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

