


T350G106M035AT7301

Aliases (T350G106M035ATTR)

T350, Tantalum, MnO₂ Tantalum, Commercial Grade, 10 uF, 20%, 35 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 2.54mm

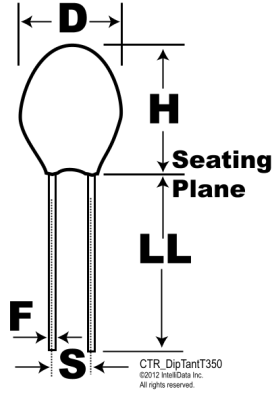

Click [here](#) for the 3D model.

Dimensions

| | |
|----|------------------|
| D | 6.3mm |
| H | 10.2mm |
| S | 2.54mm +/-0.38mm |
| LL | 12.7mm +/-1.26mm |
| F | 0.5mm +/-0.05mm |

Packaging Specifications

| | |
|--------------------|------------|
| Packaging | T&R, 305mm |
| Packaging Quantity | 1000 |

General Information

| | |
|-------------|-------------------------------------------|
| Series | T350 |
| Dielectric | MnO ₂ Tantalum |
| Style | Radial |
| Description | Radial, Solid Tantalum, Conformal, Dipped |
| Features | Low Leakage |
| RoHS | Yes |
| Termination | Tin |
| AEC-Q200 | No |
| Notes | Longest Lead Is Positive. |

Specifications

| | |
|-----------------------|------------------------------------------------------|
| Capacitance | 10 uF |
| Capacitance Tolerance | 20% |
| Voltage DC | 35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse) |
| Temperature Range | -55/+125°C |
| Dissipation Factor | 6% |
| Leakage Current | 2.8 uA |