


TABLE 1

MODEL NUMBER	LENGTH
415-0201-006	6.00±.15
415-0201-012	12.00±.25
415-0201-024	24.00±.25
415-0201-036	36.00±.50
415-0201-060	60.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	7/12/2019

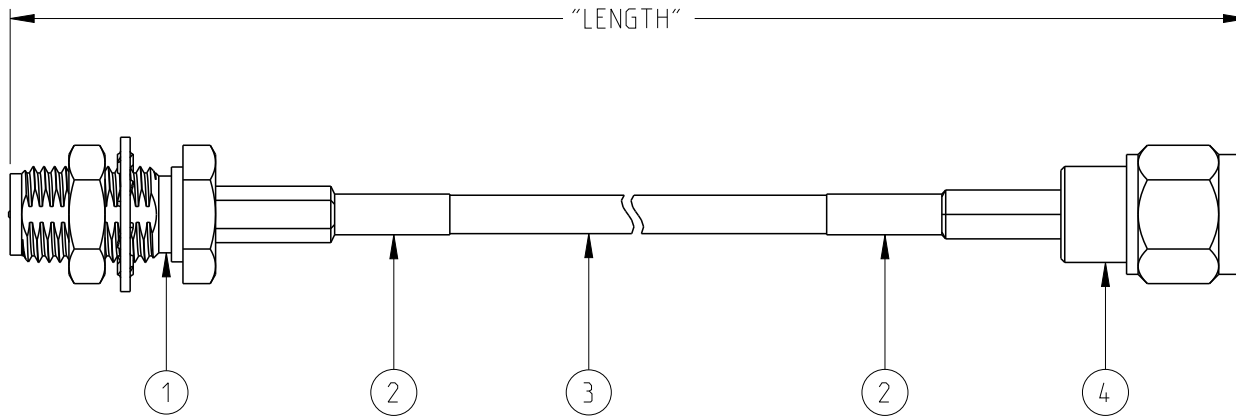

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	REVERSE POLARITY SMA BULKHEAD JACK
2	2X 1.00±0.10	HEAT SHRINK TUBING
3	AR	CABLE, RG174
4	1	REVERSE POLARITY SMA PLUG

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No: <b>415-0201-001/999</b>	<b>JOHNSON</b>		
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU	Cage Code <b>34078</b>	Title: CABLE ASSY, STR REVERSE POLARITY SMA BULKHEAD JACK TO STR REVERSE POLARITY SMA PLUG, RG174	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.010 ANGLES ±2°	3RD ANGLE PROJECTION 	Drawing No. <b>415-0201-001/999</b>	REV. <b>1</b>
	Drawn by: <b>ROMAN YAO</b>	Date: <b>7/12/2019</b>	Size <b>A</b>	DO NOT SCALE DRAWING Workmanship Std: NONE Sheet 1 OF 1