


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5961001721	~

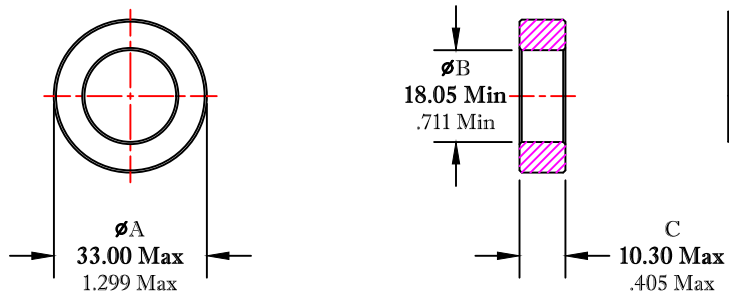

AFTER COATING

DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS							
$\Sigma l/A(mm^{-1})$	$l_e (mm)$	$A_e (mm^2)$	$V_e (mm^3)$	$L_o (nH)$	$AL (nH)$ @10 kHz <10gauss	$\tan \delta/\mu_i$ @1 MHz 1gauss	$\tan \delta/\mu_i$ @10 MHz 1gauss
1.2947	76.4	59.0	4512	0.971	120±25%	≤75X10E-6	≤350X10E-6

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 5961001701.
- 2 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION
- 3 - COATING THICKNESS = **0.25mm** (.010") Max.

FR# 61

<b>FAIR-RITE PRODUCTS CORP.</b>				
TITLE COATED TOROID				
DRAWN BY J.SERENCIS	DATE 07-17-2018	SIZE B	PART NO. 5961001721	REV. ~
CHKD BY				
APPRVD BY		SCALE NONE	SHEET 1 of 1	