


Data sheet | Item number: 706-4769/200-200

System cable; for Rockwell Compact Logix; 16 digital outputs for higher voltages; Length: 2 m; Conductor cross-section: 0.34 mm²



www.wago.com/706-4769/200-200

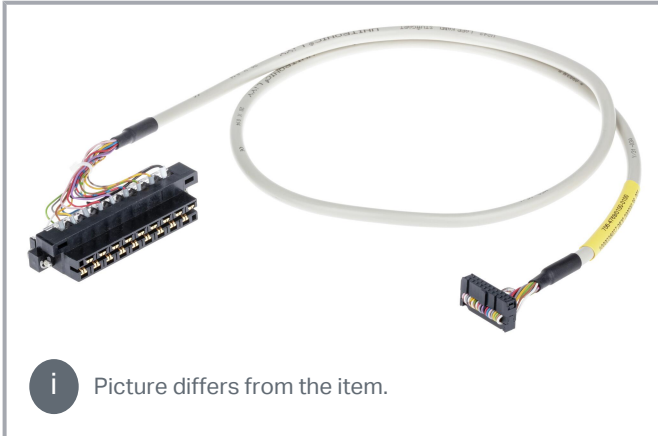

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-7		Connector WAGO 231 (JA)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	OUT0.0	2	L0
Brown		2	OUT0.1	3	L1
Green		3	OUT0.2	4	L2
Yellow		4	OUT0.3	5	L3
Grey		5	OUT0.4	6	L4
Pink		6	OUT0.5	7	L5
Blue		7	OUT0.6	8	L6
Red		8	OUT0.7	9	L7
Black		9	L	1+10	Vac1/ Vac2
Violet		10	nc	nc	nc

Color coding acc. to DIN VDE 47100 Cable 2; Channel 8-15		Connector WAGO 231 (JB)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		11	OUT1.0	12	L8
Brown		12	OUT1.1	11	L9
Green		13	OUT1.2	14	L10
Yellow		14	OUT1.3	13	L11
Grey		15	OUT1.4	16	L12
Pink		16	OUT1.5	15	L13
Blue		17	OUT1.6	18	L14
Red		18	OUT1.7	17	L15
Black		19	nc	nc	nc
Violet		20	nc	nc	nc

Data
Notes

Note

If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	16 digital outputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Compatibility

Rockwell

Rockwell Compact Logix	1769 - OA16 1769 - OW16
------------------------	----------------------------

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	WAGO 231 Series
Pole number 1	10
Connection type 1	System
Wire cross-section	0.34 mm ²

Connection 2

Connector 2	WAGO 231 Series
Pole number 2	10
Connection type 2	System

Connection 3

Connector 3	Rockwell-RTBN18
Pole number 3	18
Connection type 3	System

Physical data

Cable length	2 m
--------------	-----

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Material Data

Weight	608 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	FR
GTIN	4055143984300
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-4769/200-200	URL	Download
System cable; for Rockwell Compact Logix; 16 digital outputs for higher voltages; Length: 2 m; Conductor cross-section: 0.34 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.