



LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Olive drab Cadmium
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +175°C
- Salt Spray : 2000 hours

| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 29.4 Max |
| Z'                  | 31.5 Max |
| VV THREAD           | M18x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

|         |                             |
|---------|-----------------------------|
| Country | Jurisdiction & Control List |
| FR      | Not Listed                  |

**PN: 8D513J98HE**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 17-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |


**TITLE** Composite Plug 8D series

|       |  |                            |                 |
|-------|--|----------------------------|-----------------|
| SCALE |  | General linear Tolerances: | NPRDS / PROJECT |
| NA    |  | ±--                        | <b>859</b>      |

**SOURIAU** WWW.SOURIAU.COM

This document is the property of SOURIAU it must not be reproduced or communicated without permission

|           |                                    |  |            |
|-----------|------------------------------------|--|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D513J98HE-C</b> |  | SHEET      |
| <b>A3</b> |                                    |  | <b>1/2</b> |

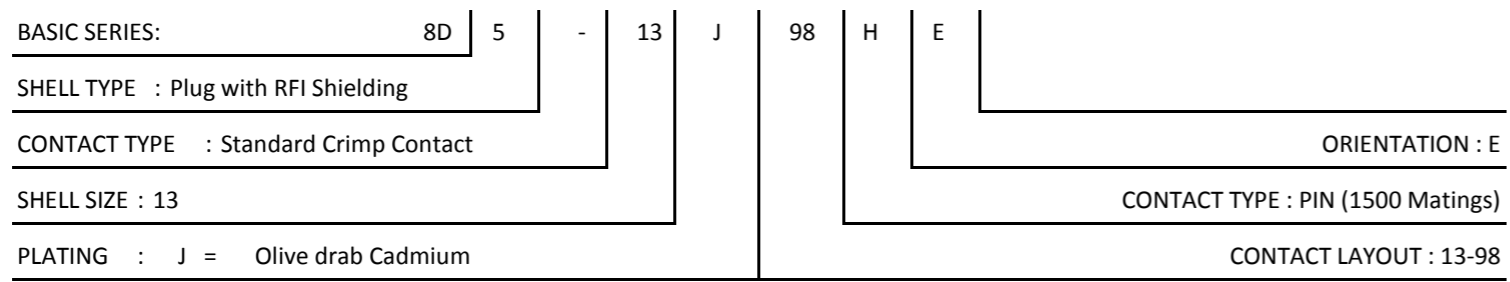

Contact Layout



| Contact position ID | Location    |             |
|---------------------|-------------|-------------|
|                     | X-axis (mm) | Y-axis (mm) |
| A                   | +000 (0.00) | +195 (4.95) |
| B                   | +125 (3.18) | +150 (3.81) |
| C                   | +193 (4.90) | +030 (0.76) |
| D                   | -104 (4.17) | -105 (2.67) |
| E                   | +000 (0.00) | -135 (3.43) |
| F                   | -164 (4.17) | -105 (2.67) |
| G                   | -193 (4.90) | +030 (0.76) |
| H                   | -125 (3.18) | +150 (3.81) |
| J                   | +065 (1.65) | -015 (0.38) |
| K                   | -065 (1.65) | -015 (0.38) |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 13         | -98             | 10                 | 20            | I              | All              | MS20051-98 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D513J98HE

|                |                                    |                            |   |
|----------------|------------------------------------|----------------------------|---|
| A              | 17-10-2016                         | First Release              |   |
| ISS            | DATE                               | Latest modification - by   | MOD N°  |
| Designed By:   |                                    | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>    |                            |   |
| SCALE          |                                    | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                    | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>             |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D513J98HE-C</b> |                            | SHEET 2/2   |