


10HV20N101KN

Aliases (10HV20N101K)

HV RAD-LDD Indust COG HV, Ceramic, 100 pF, 10%, 1000 VDC, COG, Commercial, High Voltage, Lead Spacing = 4.32mm

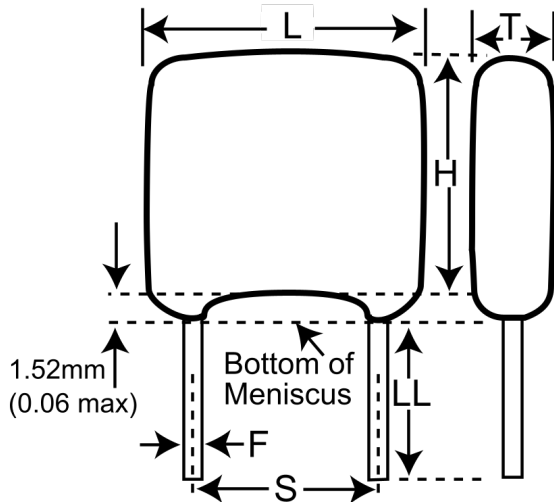

Click [here](#) for the 3D model.

Dimensions	
L	6.35mm MAX
H	5.59mm MAX
T	5.08mm MAX
S	4.32mm +/-0.762mm
LL	3.175mm MIN
F	0.635mm +0.102/-0.051mm

Packaging Specifications	
Packaging	Waffle
Packaging Quantity	28

General Information	
Series	HV RAD-LDD Indust COG HV
Style	Radial
Description	Commercial, High Voltage
Features	Commercial
RoHS	With Exemptions
REACH	SVHC (Pb - CAS 7439-92-1)
SCIP Number	ef26097b-3862-4ee0-b0ad-404a563ece0f
Termination	Nickel
Failure Rate	N/A
AEC-Q200	No

Specifications	
Capacitance	100 pF
Capacitance Tolerance	10%
Voltage DC	1000 VDC
Dielectric Withstanding Voltage	1200 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	COG
Dissipation Factor	0.15%
Aging Rate	0% Loss/Decade Hour
Insulation Resistance	100 GOhms