


LOC AI	DIST 00	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	B1	ECR-15-002378		12FEB15	LS	GS

# HTV10 HAND TOOL, MATE-N-LOK, 0.2-0.82 SQ.MM

FRONT VIEW

SIDE VIEW

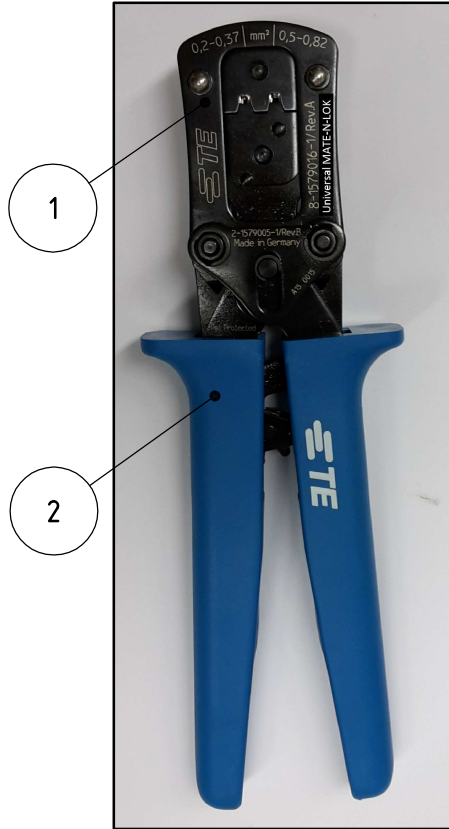

Eigenschaften / Features

Der Crimpkopf verfügt über zwei Crimpnester in denen zwei Leitungsquerschnitte verarbeitet werden können. Die Kontakte werden mittels Klapppositionierer in die richtige Ausgangsposition gesetzt und gehalten.

Crimping head featured with two crimping nests to enable processing of two different wire sizes. Terminals will be correct inserted by means of a flap locator.

Ersatzteil / Spare part

HTV10 CRIMP HEAD MATE-N-LOK, 0.2-0.82 SQ.MM  
- TE P/N 8-1579016-1

Abmessungen / Dimensions:

Länge / Length: 195 mm  
Breite / Width: 64.5 mm  
Tiefe / Depth: 22 mm

Stückliste / Parts list

POS	TE-P/N	REV	QTY	DESCRIPTION
1	8-1579016-1	A	1	HTV10 CRIMP HEAD MATE-N-LOK, 0.2-0.82
2	2-1579005-1	B	1	BASIC HAND TOOL GRIP, SHORT, C

CUSTOMER MANUAL:  
411-18580 / 744017-9

Anwendungsbereich / Application range

Leiterquerschnitt Cross section range (in sq.mm)	Leitercrimpöhe Conductor Crimp Height ±0,05 (in mm)	Leitercrimpbreite Conductor Crimp Width gemessen an den Tangenten der Radien in (mm)	Isolationscrimpöhe Insulation Crimp Height ±0,05 (in mm)	Isolationscrimpbreite Insulation Crimp Width gemessen an den Tangenten der Radien in (mm)	TE P/N- Kontakt TE P/N- Contact UNIVERSAL MATE-N-LOK
0,2 - 0,37	0,98	1,76 F	2,03	2,47 F	350689-1 - Buchse / Socket
0,5 - 0,82	1,13		2,03		350690-1 - Stift / Pin

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT -

DIMENSIONS: mm	DWN L.Sandhu	27 JAN 2015	MATERIAL	FINISH
	CHK C. Witt	27 JAN 2015	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD C. Witt	27 JAN 2015		
	PRODUCT SPEC			SIZE A4
APPLICATION SPEC			DRAWING NO C= 1579024-8	RESTRICTED TO -
WEIGHT 0.296kg			SCALE —	
CUSTOMER DRAWING			SHEET 1 OF 1	REV B1