

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 33nF 16V(0603B333K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 16V, 120sec)

Item	Spec
Cap [nF]	33(±10%)
DF	≤ 3.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4294A)

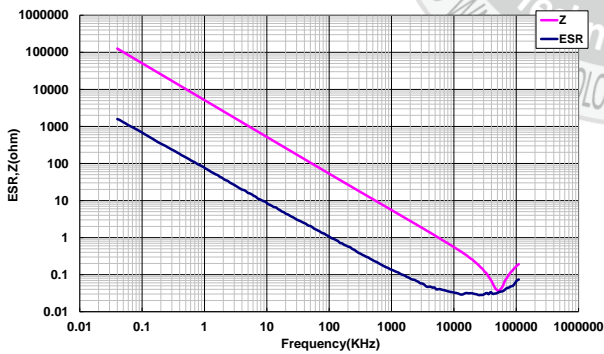

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

8V : -1.80% ; 16V : -6.40%

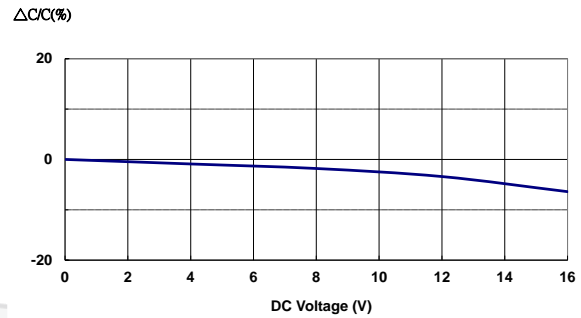


6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

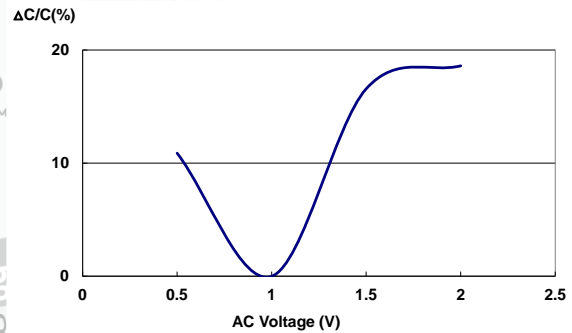

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

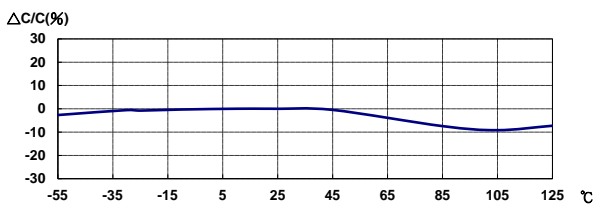

Last updated : 2020/6/23