



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES IN PART OR WHOLE WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	15/SEP/09	
A1	CHANGE BNC IMPEDANCE FROM 50 OHM TO 75 OHM.	28/OCT/09	
A2	ADD LENGTH LIST	29/DEC/09	

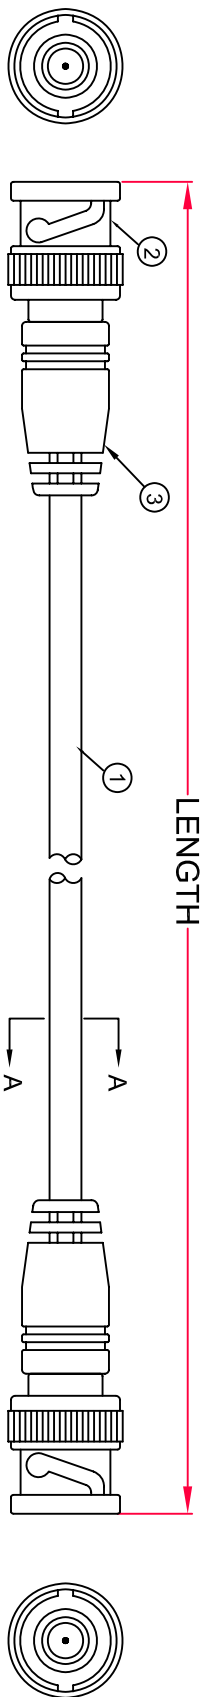

BNC M

BNC M



SECTION A-A

LENGTH & P/N Table

LENGTH	P/N
6 INCH(152± 15mm)	CO-059BNCX200-000.6
1FT(305± 20mm)	CO-059BNCX200-001
1.5FT(457± 20mm)	CO-059BNCX200-001.5
2FT(610± 30mm)	CO-059BNCX200-002
3FT(914± 30mm)	CO-059BNCX200-003
4FT(1219± 30mm)	CO-059BNCX200-004
5FT(1524± 30mm)	CO-059BNCX200-005
6FT(1829± 30mm)	CO-059BNCX200-006
7.5FT(2286± 40mm)	CO-059BNCX200-007.5
10FT(3048± 40mm)	CO-059BNCX200-010
12FT(3658± 50mm)	CO-059BNCX200-012
15FT(4572± 50mm)	CO-059BNCX200-015
25FT(7620± 100mm)	CO-059BNCX200-025
50FT(15240± 150mm)	CO-059BNCX200-050
75FT(22860± 150mm)	CO-059BNCX200-075
100FT(30480± 200mm)	CO-059BNCX200-100
150FT(45720± 200mm)	CO-059BNCX200-150
200FT(60960± 300mm)	CO-059BNCX200-200

- NOTES:
- 1.CABLE:122AWG(1/0.643± 0.01mm)]CP\*1C+ BRAID[(16\*8/0.12± 0.008mm)] TINNEE COPPER INSULATION:PE OD= 3.7± 0.10mm COLOR:TRANSPARENT JACKET:HALF MATTE PVC OD=Ø6.15± 0.15mm COLOR:BLACK
  - 2.CONNECTOR:BNC Male NICKEL-PLATED 75 OHM
  - 3.MOLDING SR:45Pa PVC BLACK
  - 4.OPEN/SHORT MISS WIRE TEST 100 %
  - 5.CONDUCTOR RESISTANCE ≤ 225.6Ω/km
  - 6.INSULATION RESISTANCE ≥ 2MΩ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH ROHS STANDARD.

PIN OUT:

CENTER \_\_\_\_\_ CENTER


SHELL \_\_\_\_\_ SHELL



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.	
DECIMALS	ANGLES	20 VALLEY ST. ENDCOTT, NY 13760	
.X ±.X	± X°	Amphenol Cables on Demand	
.XX ±.XX			
.XXX ±.XXX			
THIRD ANGLE PROJECTION		RG59A/U BNC M/BNC M	
MFG ENG		SIZE	DWG. NO.
		A	CO-059BNCX200-XXX

NOTES: UNLESS OTHERWISE SPECIFIED

CAD FILE



APPROVALS	DATE	SCALE	SHEET	OF
LF	25/DEC/09	1	1	1
CHECKED	BA			
RESP ENG				
REV. A2				