
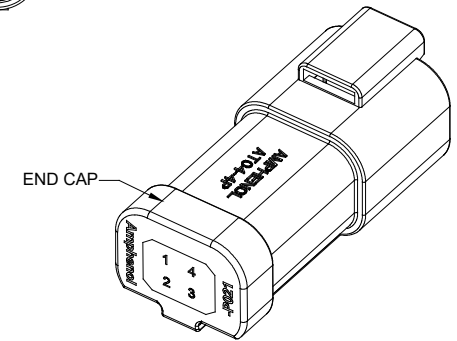


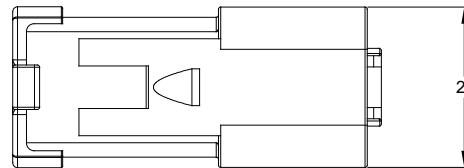
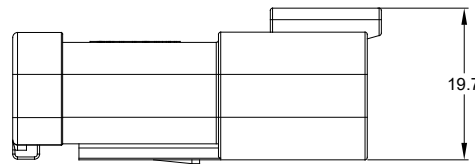


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DRAWING	10APR18	ROOKIE	TOMMY
A2	-	REVISED DESCRIPTION	12JUN19	JAH	DH

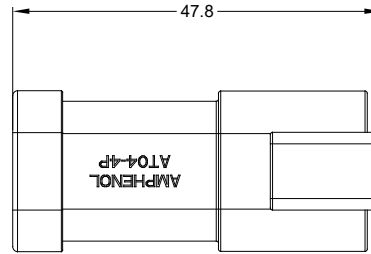

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:  
HOUSING: THERMOPLASTIC, GREY  
SEAL: SILICONE RUBBER  
CONTACT: COPPER ALLOY
- MODIFICATIONS: GREY, 4 PIN BUSBAR WITH NICKEL PLATED
- SPECIFICATIONS:
  - CURRENT RATING: 26 AMPS MAXIMUM FOR THE 4 PIN BUSBAR
  - OPERATING TEMPERATURE: -55°C TO +125°C.
  - DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
  - MOISTURE RESISTANCE: IP67 ( MATED CONDITION ).
  - MATING CYCLE DURABILITY: 100 CYCLES
  - RoHS COMPLIANT
- MATING PART: AT06-4S\* PLUG  
(\* = AVAILABLE MODIFICATIONS)

ORIENTATION OF "Amphenol" AND "-P021" TO BE OPTIONAL

- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

AT04-4P-P021		REF: DT04-4P-P021	
PART NUMBER		DESCRIPTION	
QUANTITY		ITEM	
<b>MATERIALS LIST</b>			
UNLESS OTHERWISE SPECIFIED:			
1) All dimensions are in metric (mm).			
2) Tolerances are as follows:			
1 PL DEC ±0.30	Fractions ±1/64		
2 PL DEC ±0.15	Angles ±1°		
3 PL DEC ±0.08			
3) Note reference =			
MATERIAL SPECIFICATIONS:		SIGNATURES	
		DATE	
		DRAWN: ROOKIE 09APR18	
		CHECKED: ORION 09APR18	
		ENGINEER:	
		APPROVAL: TOMMY 09APR18	
CUSTOMER:			
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
NEXT ASSY:			
SIZE: B	TYPE: C	DWG NO: AT04-4P-P021	REVISION: A2
SCALE: NONE		SHEET 1 OF 1	

TITLE: HYPERBUSS AT 4WAY RECP 4 PIN BUSBAR NICKEL-PLATED, GREY  
DWG NO: AT04-4P-P021  
REV: A2  
SH: 1  
OF: 1