


VRR60L474KWA

VRR Indust X7R HVHT200C, Ceramic, 0.47 uF, 10%, 500 VDC, X7R, Commercial, High Temperature, HighVoltage, Lead Spacing = 10.16mm

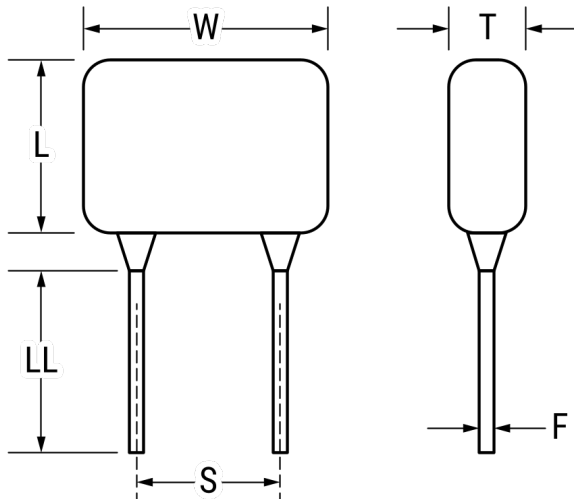

Click [here](#) for the 3D model.

Dimensions

L	13.97mm MAX
W	15.24mm MAX
T	9.52mm MAX
S	10.16mm +/-0.76mm
LL	3.175mm MIN
F	0.813mm +/-0.102mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	1

General Information

Series	VRR Indust X7R HVHT200C
Style	Radial
Description	Commercial, High Temperature, HighVoltage
Features	High Temperature, High Voltage, Commercial
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	8b930311-e6ed-4436-9857-2b5f449be092
Termination	Lead (SnPb)
Failure Rate	N/A
Testing and Reliability	MIL-PRF-20 Group A
Qualifications	MIL-PRF-20 Group A
AEC-Q200	No

Specifications

Capacitance	0.47 uF
Capacitance Tolerance	10%
Voltage DC	500 VDC
Dielectric Withstanding Voltage	750 VDC
Temperature Range	-55/+200°C
Temperature Coefficient	X7R
Dissipation Factor	2.5% 1 kHz 1.0Vrms
Insulation Resistance	2.1277 GOhms