

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0402 X7R 4.7nF 16V(0402B472K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @16V, 120sec)

Item	Spec
Cap [nF]	4.7(±10%)
DF	≤3.5%
IR [G-ohm]	≥10


3. Impedance/ESR-Frequency

(Equipment: 4991B)

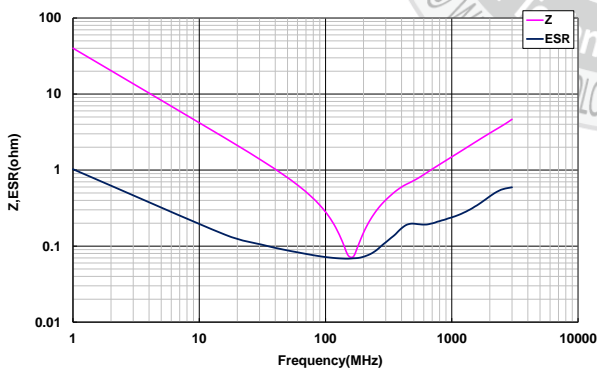

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

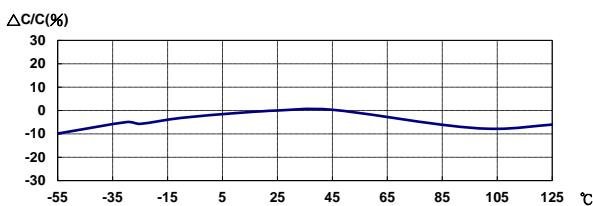

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

8V : 1.40% ; 16V : -6.58%

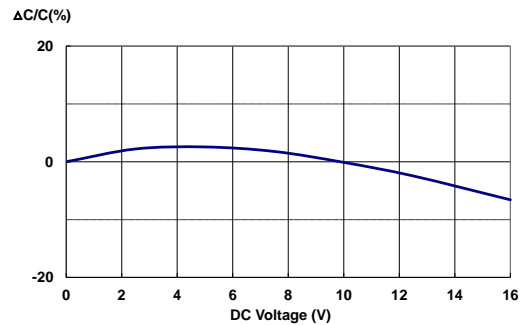

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

